Arruti Substations

BRONZE DUPLEX CONNECTORS

REFERENCE
RD3B

Straight connector for duplex copper cables to copper tube/stud.

Material: Casting - Bronze
Hardware: Stainless or Galvanized Steel

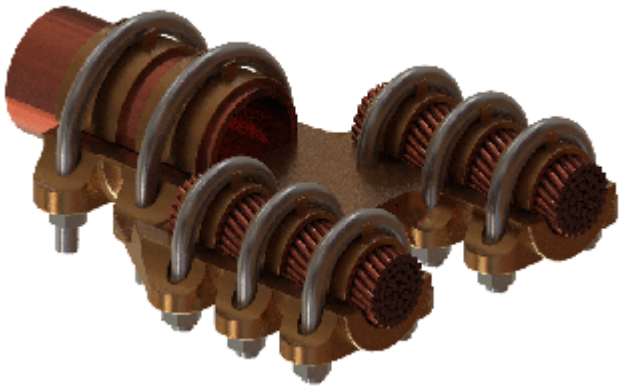

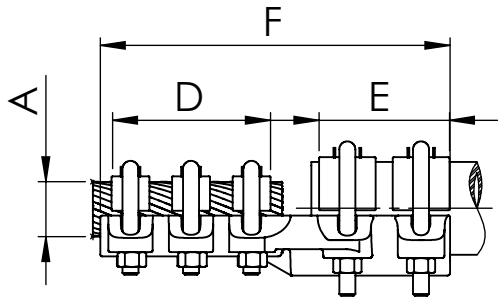

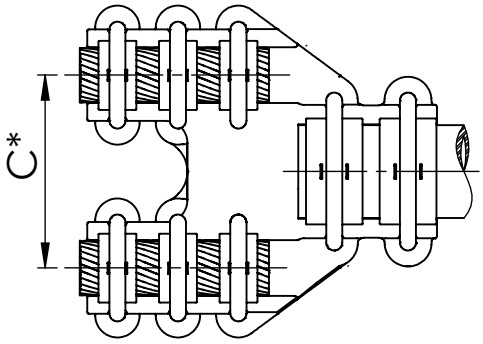

*C: space between cables 1=4", 15=6"

CATALOG NUMBER	CONDUCTOR RANGE	DIMENSIONS					Tightening torque (ft.lb)	
	A	B	C	D	E	F	A	B
RD3B.*-15033	0.49-0.61	1		2.87	2.44	5.91	15	20
RD3B.*-15042	0.49-0.61	1 1/4		2.87	2.64	6.10	15	20
RD3B.*-15048	0.49-0.61	1 1/2		2.87	2.95	6.42	15	20
RD3B.*-15060	0.49-0.61	2		2.87	3.15	6.50	15	20
RD3B.*-25033	0.69-0.79	1		3.15	2.44	6.18	15	20
RD3B.*-25042	0.69-0.79	1 1/4		3.15	2.64	6.38	15	20
RD3B.*-25048	0.69-0.79	1 1/2		3.15	2.95	6.69	15	20
RD3B.*-25060	0.69-0.79	2		3.15	3.15	6.89	15	20
RD3B.*-40033	0.89-1.02	1		3.35	2.44	6.38	15	20
RD3B.*-40042	0.89-1.02	1 1/4		3.35	2.64	6.57	15	20
RD3B.*-40048	0.89-1.02	1 1/2		3.35	2.95	6.89	15	20
RD3B.*-40060	0.89-1.02	2		3.35	3.15	7.09	15	20
RD3B.*-50033	1.14	1		3.70	2.44	6.73	20	20
RD3B.*-50042	1.14	1 1/4		3.70	2.64	6.93	20	20
RD3B.*-50048	1.14	1 1/2		3.70	2.95	7.20	20	20
RD3B.*-50060	1.14	2		3.70	3.15	7.48	20	20