




Industrias Arruti

STRAIN CLAMPS

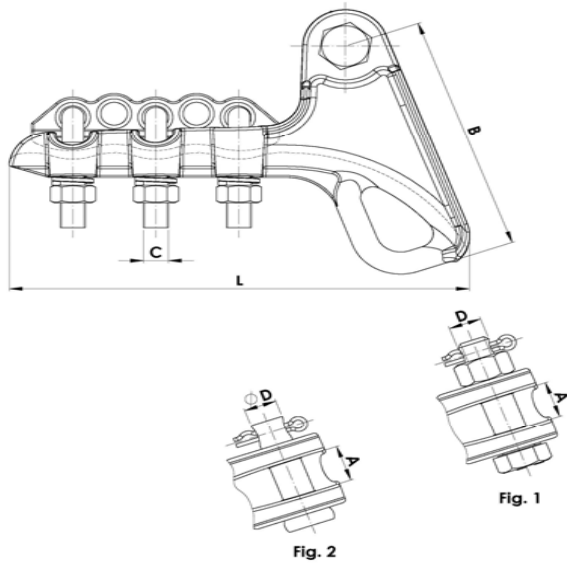

Reference	Figure	Ø Conductor		Dimensions (inch)					U-Bolts	Tightening	Ultimate strength	Weight
		Min.	Max.	A	B	C	D	L	Nº	Torque (ftlb)	(lb)	(lb)
GA-1-PE/AM	Fig.2	0,16	0,47	0,71	3,15	3/8	5/8	4,72	2	20	8.000	0,95
GA-1/AM	Fig.2	0,16	0,47	0,71	4,92	1/2	5/8	6,10	2	25	9.000	1,52
GA-1T/AM	Fig.1	0,16	0,47	0,71	4,92	1/2	5/8	6,10	2	25	9.000	1,54
GA-2/AM	Fig.2	0,39	0,63	0,79	5,30	1/2	5/8	8,78	3	35	15.000	2,51
GA-2T/AM	Fig.1	0,39	0,63	0,79	5,30	1/2	5/8	8,78	3	35	15.000	2,6
GA-3/AM	Fig.2	0,63	0,87	1,02	6,61	1/2	5/8	13,39	4	35	20.000	4,03
GA-3T/AM	Fig.1	0,63	0,87	1,02	6,61	1/2	5/8	13,39	4	35	20.000	4,12
GA-4T/AM	Fig.1	0,79	1,22	1,54	9,65	9/16	3/4	18,11	5	60	30.000	9,33
GA-5T/AM	Fig.1	1,22	1,52	1,79	9,92	9/16	3/4	18,88	5	60	30.000	11,35

NOTE: The clamps can be provided with stainless steel fasteners (except connection screw to fitting string).

Other kinds of fasteners upon request.

Bolt: ASTM A325
Nuts: ASTM A563
Lockin pins: Stainless steel