



PARALLEL CONNECTORS FOR ALUMOWELD, OPGW, AL AND AL-AC EARTHWIRE

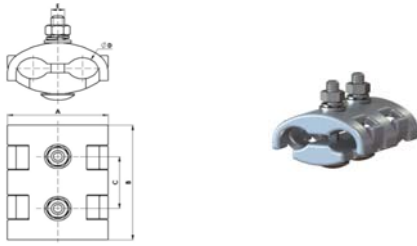

Material: Alloy A1 . EN-1706 (similar to ANSI A413.0). Bolt: ASTM A325.
Steel parts finish: Hot dip galvanising ASTM A153. Nut: ASTM A563.

Reference	ØD Conductor		Dimensions (inch)				Tightening Torque (ftlb)	Weight (lb)
	Min.	Max.	A	B	C	E		
GPC-8/16/AM	0.31	0.63	2.13	2.34	1.22	3/8	220	0.55
GPC-11/28/AM	0.43	1.10	3.58	4.53	2.05	1/2	260	1.92


NOTE: Special fasteners upon request.

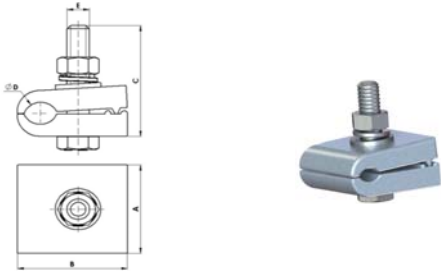

Material: Alloy A1 . EN-1706 (similar to ANSI A413.0). Bolt: ASTM A325.
Steel parts finish: Hot dip galvanising ASTM A153. Nut: ASTM A563.

Reference	ØD Conductor		Dimensions (inch)				Tightening Torque (ftlb)	Weight (lb)
	Min.	Max.	A	B	C	E		
GCSAL-8/14/AM	0.31	0.55	2.05	2.28	2.56	1/2	20	0.62
GCSAL-14/18/AM	0.55	0.71	2.05	2.28	2.56	1/2	20	0.55
GCSAL-18/24/AM	0.71	0.94	2.36	2.56	3.15	1/2	20	0.99

NOTE: Special fasteners upon request.

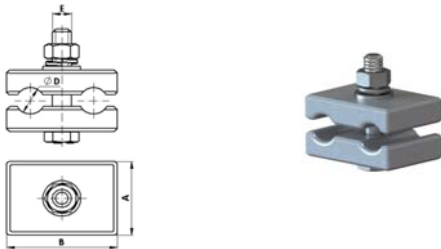

Material: Alloy A1 . EN-1706 (similar to ANSI A413.0). Bolt: ASTM A325.
Steel parts finish: Hot dip galvanising ASTM A153. Nut: ASTM A563.

Reference	ØD Conductor		Dimensions (inch)			Tightening Torque (ftlb)	Weight (lb)
	Min.	Max.	A	B	E		
GCPSAL-8/14/AM	0.31	0.55	1.97	2.76	1/2	20	0.88
GCPSAL-14/18/AM	0.55	0.71	1.97	2.76	1/2	20	0.82
GCPSAL-18/24/AM	0.71	0.94	1.97	2.76	1/2	20	0.77

NOTE: Special fasteners upon request.



Material: Alloy A1 . EN-1706 (similar to ANSI A413.0). Bolt: ASTM A325.
Steel parts finish: Hot dip galvanising ASTM A153. Nut: ASTM A563.

Reference	ØD Conductor		Dimensions (inch)				Tightening Torque (ftlb)	Weight (lb)
	Min.	Max.	A	B	C	E		
PC-6-14/AM	0.24	355.00	2.36	3.15	1.57	1/2	20	0.99

NOTE: Special fasteners upon request.