



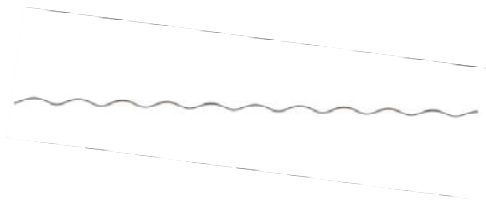

Industrias Arruti

ARMOUR RODS

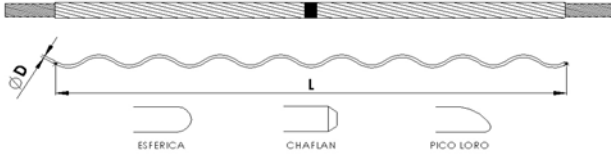

Application: Conductors AAAC, AAC, ACSR, ... (Conductors Al, and Al-Ac).
Material: Alloy Al. According to UNE EN-50183 and IEC 60104.

Reference	Ø Conductor (inch)		Dimensions (inch)		Nº Armour rods	Identification colour	Weight (lb)
	Min.	Max.	Ø D (Thread)	L			
VPAL 062-066	0,24	0,26	0,15	40,16	7	ORANGE	0,496
VPAL 066-069	0,26	0,27	0,15	42,13	7	GREEN	0,518
VPAL 069-073	0,27	0,29	0,15	42,13	8	YELLOW	0,595
VPAL 073-078	0,29	0,31	0,15	42,13	8	PURPLE	0,595
VPAL 078-083	0,31	0,33	0,15	44,09	9	RED	0,705
VPAL 083-088	0,33	0,35	0,15	46,06	9	BLUE	0,728
VPAL 088-093	0,35	0,37	0,15	48,03	9	GREEN	0,761
VPAL 093-099	0,37	0,39	0,15	50,00	9	BLACK	0,794
VPAL 099-105	0,39	0,41	0,15	51,97	10	YELLOW	0,915
VPAL 105-111	0,41	0,44	0,15	51,97	10	BROWN	0,915
VPAL 111-117	0,44	0,46	0,18	53,94	9	BLUE	1,334
VPAL 117-124	0,46	0,49	0,18	53,94	10	GREEN	1,477
VPAL 124-132	0,49	0,52	0,18	55,91	10	ORANGE	1,532
VPAL 132-140	0,52	0,55	0,18	57,87	11	PURPLE	1,742
VPAL 140-148	0,55	0,59	0,18	59,84	11	RED	1,808
VPAL 148-154	0,59	0,61	0,18	61,81	12	BLACK	2,028
VPAL 154-160	0,61	0,63	0,18	64,17	12	WHITE	2,105
VPAL 160-166	0,63	0,66	0,18	64,17	12	YELLOW	2,105
VPAL 166-172	0,66	0,68	0,18	66,14	13	BROWN	2,359
VPAL 172-178	0,68	0,70	0,20	68,11	12	BLUE	2,811
VPAL 178-188	0,70	0,74	0,20	72,05	12	GREEN	2,976
VPAL 188-199	0,74	0,78	0,20	72,05	13	ORANGE	3,230
VPAL 199-206	0,78	0,81	0,25	75,98	11	PURPLE	4,321
VPAL 206-214	0,81	0,84	0,25	75,98	11	RED	4,321
VPAL 214-230	0,85	0,91	0,25	77,95	12	BLUE	4,839
VPAL 230-236	0,91	0,93	0,25	79,92	13	GREEN	5,379
VPAL 236-248	0,93	0,98	0,25	88,19	13	WHITE	5,930
VPAL 248-258	0,98	1,02	0,31	92,13	11	YELLOW	8,058
VPAL 258-263	1,02	1,04	0,31	94,09	12	BROWN	8,973
VPAL 263-270	1,04	1,06	0,31	96,06	12	BLUE	9,160
VPAL 270-279	1,06	1,10	0,31	100,00	12	GREEN	9,535
VPAL 279-289	1,10	1,14	0,31	100,00	12	ORANGE	9,535
VPAL 289-295	1,14	1,16	0,31	100,00	13	PURPLE	10,340
VPAL 295-307	1,16	1,21	0,31	100,00	13	RED	10,340
VPAL 307-322	1,21	1,27	0,36	100,00	12	BLACK	13,239
VPAL 322-337	1,27	1,33	0,36	100,00	12	WHITE	13,239
VPAL 337-353	1,33	1,39	0,36	100,00	13	YELLOW	14,341
VPAL 353-366	1,39	1,44	0,36	100,00	13	BROWN	14,341
VPAL 366-383	1,44	1,51	0,36	100,00	14	BLUE	15,443

NOTE: State direction of the conductor wiring. Code according to direction of wiring.

Rods for othr conductor Ø upon request.

The finish of the rods will be defined according to the voltage and the size of the rod.

Different kinds of rods can be provided according to the requirements.