


This drawing is property of I. Arruti and must not be copied, exhibited or furnished without the written consent of I. Arruti

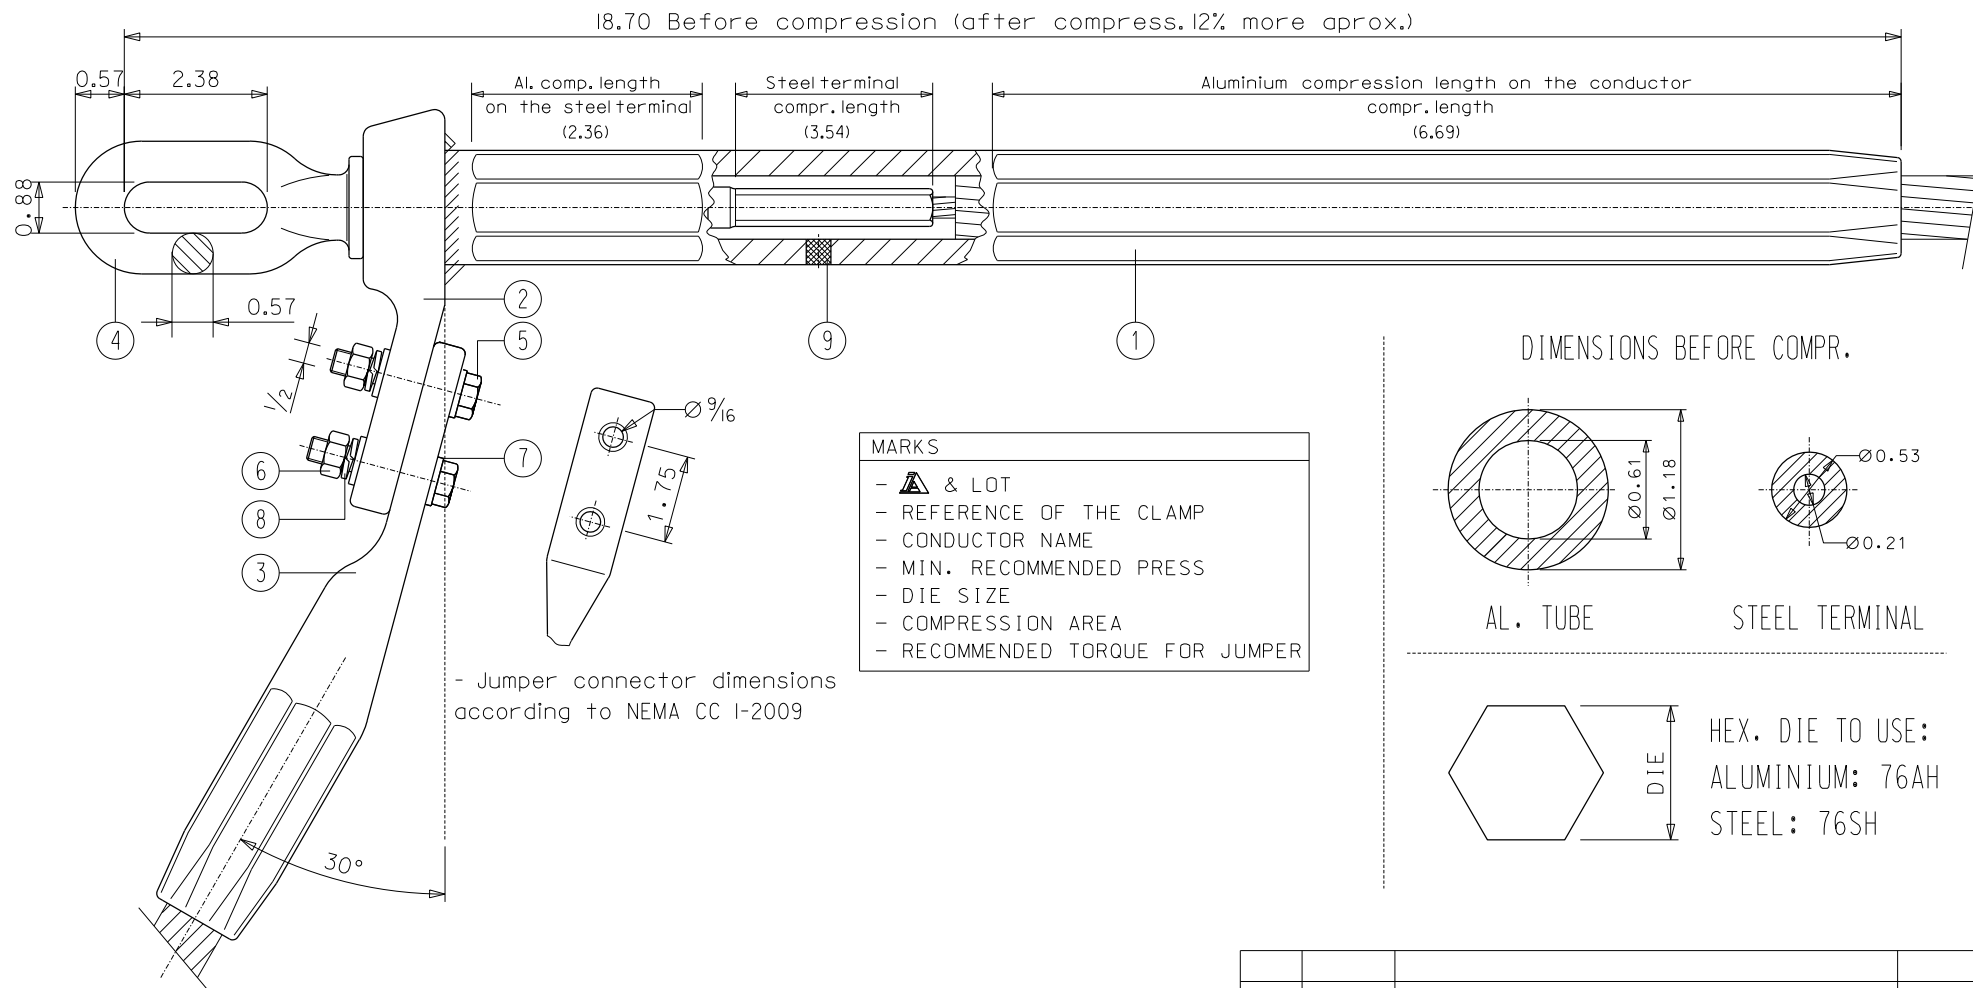

**Notes:**

- Both sides of the pad are finished to present excellent electrical contact surfaces
- Electrical connection pads will be supplied with a protective covering
- Hot dip galvanized according to ASTM A153
- Tolerances unless otherwise stated to be up to and including 1.4" ±0.027 Over 1.4" ±2%
- All dimensions in inches

N	QTY	DENOMINATION	MATERIAL
9	1	FILLER PLUG	ALUMINIUM
8	2	SPRING LOCK 1/2" ASME B18.21.I	STAINLESS STEEL
7	4	FLAT WASHER 1/2" ASME B18.21.I	STAINLESS STEEL
6	2	HEX NUT 1/2" ASME B18.2.2	STAINLESS STEEL
5	2	BOLT 1/2"x2 ASME B18.2.1	STAINLESS STEEL
4	1	EYE TERMINAL 7430-F	FORGING STEEL GALV.
3	1	JUMPER CONNECTOR DC-30	ALUMINIUM
2	1	DEAD END LUG	ALUMINIUM
1	1	CLAMP BODY	ALUMINIUM

MOD.	DATE	MODIFICATION	DRAWN BY
		CODE	
<b>EYE TERMINAL COMPRESSION CLAMP C-125/AM-IX FOR ACSR PENGUIN CONDUCTOR</b>			
UNIT (inch)		Recomended Torque: 35 f+lb	
		Aprox. Weight: 4.20 lb	
		U.S.: 95% of conductor R.B.S.	
DRAWN	J.E.	01-06-21	SCALE
CHECKED	I.L.	01-06-21	DWG No
		D/S	ISSUE
		C125AMIX	0



INDUSTRIAS  
ARRUTI S.A.

F 40513 NAME

ARCHIVO: usacompression