


This drawing is property of I. Arruti and must not be copied, exhibited or furnished without the written consent of I. Arruti

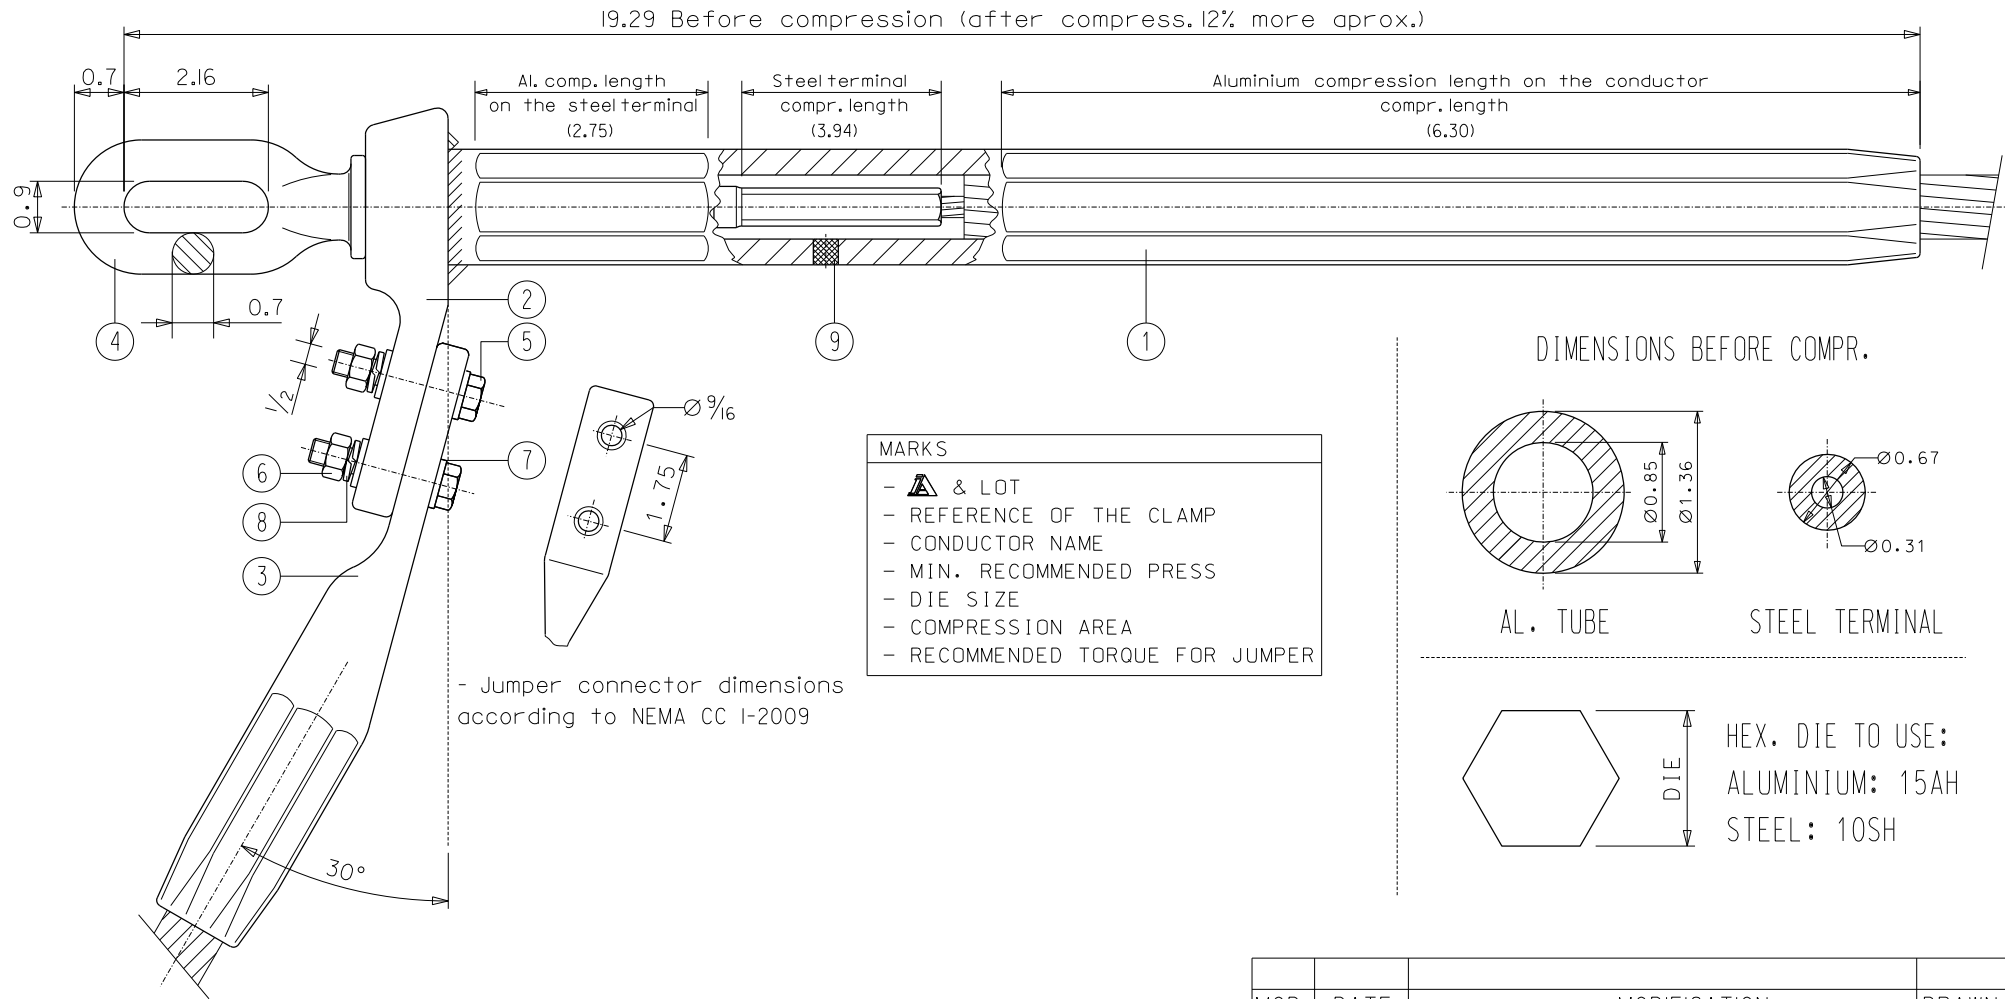

**Notes:**

- Both sides of the pad are finished to present excellent electrical contact surfaces
- Electrical connection pads will be supplied with a protective covering
- Hot dip galvanized according to ASTM A153
- Tolerances unless otherwise stated to be up to and including 1.4" ±0.027 Over 1.4" ±2%
- All dimensions in inches

QTY	DENOMINATION	MATERIAL
9	1 FILLER PLUG	ALUMINIUM
8	2 SPRING LOCK 1/2" ASME B18.21.1	STAINLESS STEEL
7	4 FLAT WASHER 1/2" ASME B18.21.1	STAINLESS STEEL
6	2 HEX NUT 1/2" ASME B18.2.2	STAINLESS STEEL
5	2 BOLT 1/2"x2 ASME B18.2.1	STAINLESS STEEL
4	1 EYE TERMINAL 7440-F	FORGING STEEL GALV.
3	1 JUMPER CONNECTOR DC-34,5	ALUMINIUM
2	1 DEAD END LUG 508-G	ALUMINIUM
1	1 CLAMP BODY	ALUMINIUM

MOD.	DATE	MODIFICATION	DRAWN BY		
 INDUSTRIAS ARRUTI S.A.		CODE			
		EYE TERMINAL COMPRESSION CLAMP C-235/AM-IX FOR ACSR IBIS CONDUCTOR			
 UNIT (inch)		Recomended Torque: 35 ftlb			
		Aprox. Weight: 6.65 lb			
DRAWN J.E. CHECKED I.L.		U.S.: 95% of conductor R.B.S.			
		09-09-20	SCALE	DWG No	ISSUE
		09-09-20	D/S	C235AMIX	0

ARCHIVO-usccompression