


This drawing is property of I. Arruti and must not be copied, exhibited or furnished without the written consent of I. Arruti

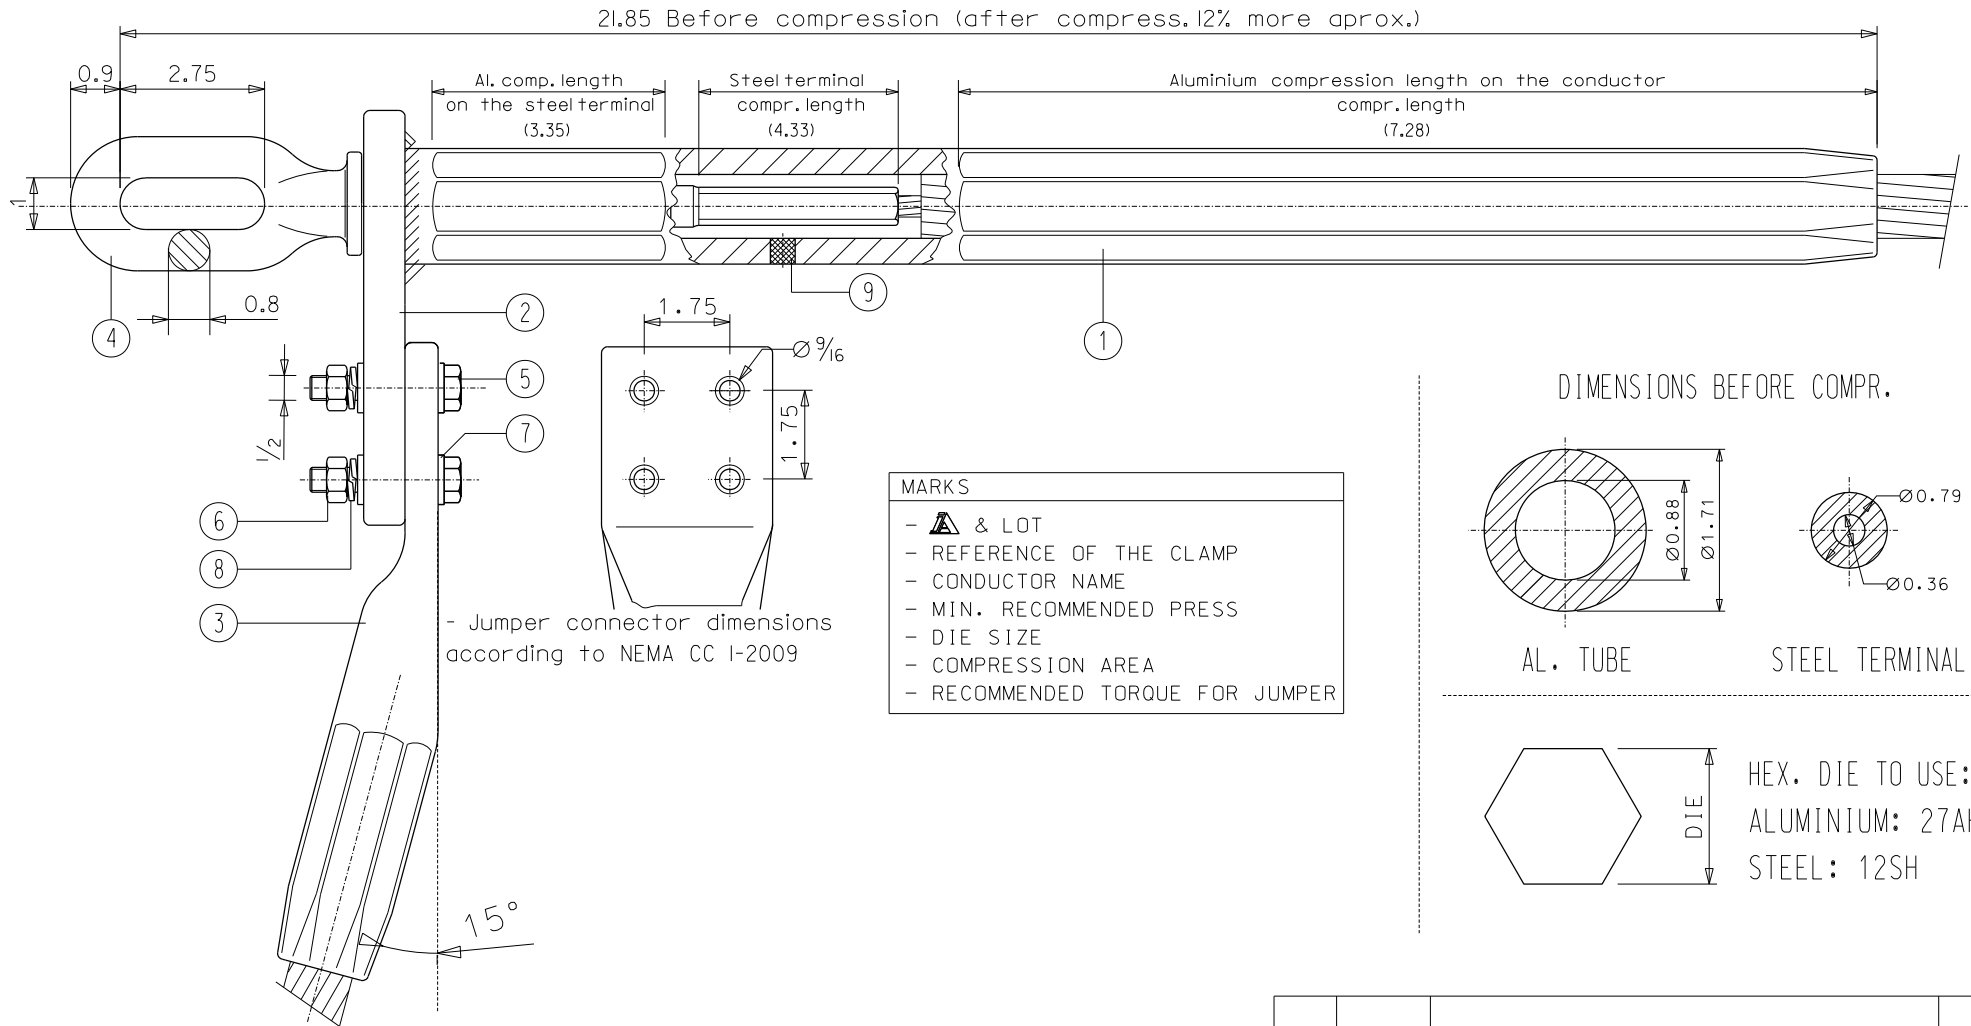

**Notes:**

- Both sides of the pad are finished to present excellent electrical contact surfaces
- Electrical connection pads will be supplied with a protective covering
- Hot dip galvanized according to ASTM A153
- Tolerances unless otherwise stated to be up to and including 1.4" ±0.027 Over 1.4" ±2%
- All dimensions in inches

QTY	DENOMINATION	MATERIAL
9	1 FILLER PLUG	ALUMINIUM
8	4 SPRING LOCK 1/2" ASME B18.21.1	STAINLESS STEEL
7	8 FLAT WASHER 1/2" ASME B18.21.1	STAINLESS STEEL
6	4 HEX NUT 1/2" ASME B18.2.2	STAINLESS STEEL
5	4 BOLT 1/2"x2.5 ASME B18.2.1	STAINLESS STEEL
4	1 EYE TERMINAL	FORGING STEEL GALV.
3	1 JUMPER CONNECTOR DC-43,5	ALUMINIUM
2	1 DEAD END LUG	ALUMINIUM
1	1 CLAMP BODY	ALUMINIUM

MOD.	DATE	MODIFICATION	DRAWN BY
		CODE	
 INDUSTRIAS ARRUTI S.A.		EYE TERMINAL COMPRESSION CLAMP C-248-SS/AM-IX FOR ACSS LARK CONDUCTOR	
		UNIT (inch)	Recomended Torque: 35 ftlb Aprox. Weight: 8.09 lb U.S.: 95% of conductor R.B.S.
DRAWN	J.E.	09-09-20	SCALE DWG No
CHECKED	I.L.	09-09-20	D/S C248SSAMIX 0

ARCHIVO-usocompression