


This drawing is property of I. Arruti and must not be copied, exhibited or furnished without the written consent of I. Arruti

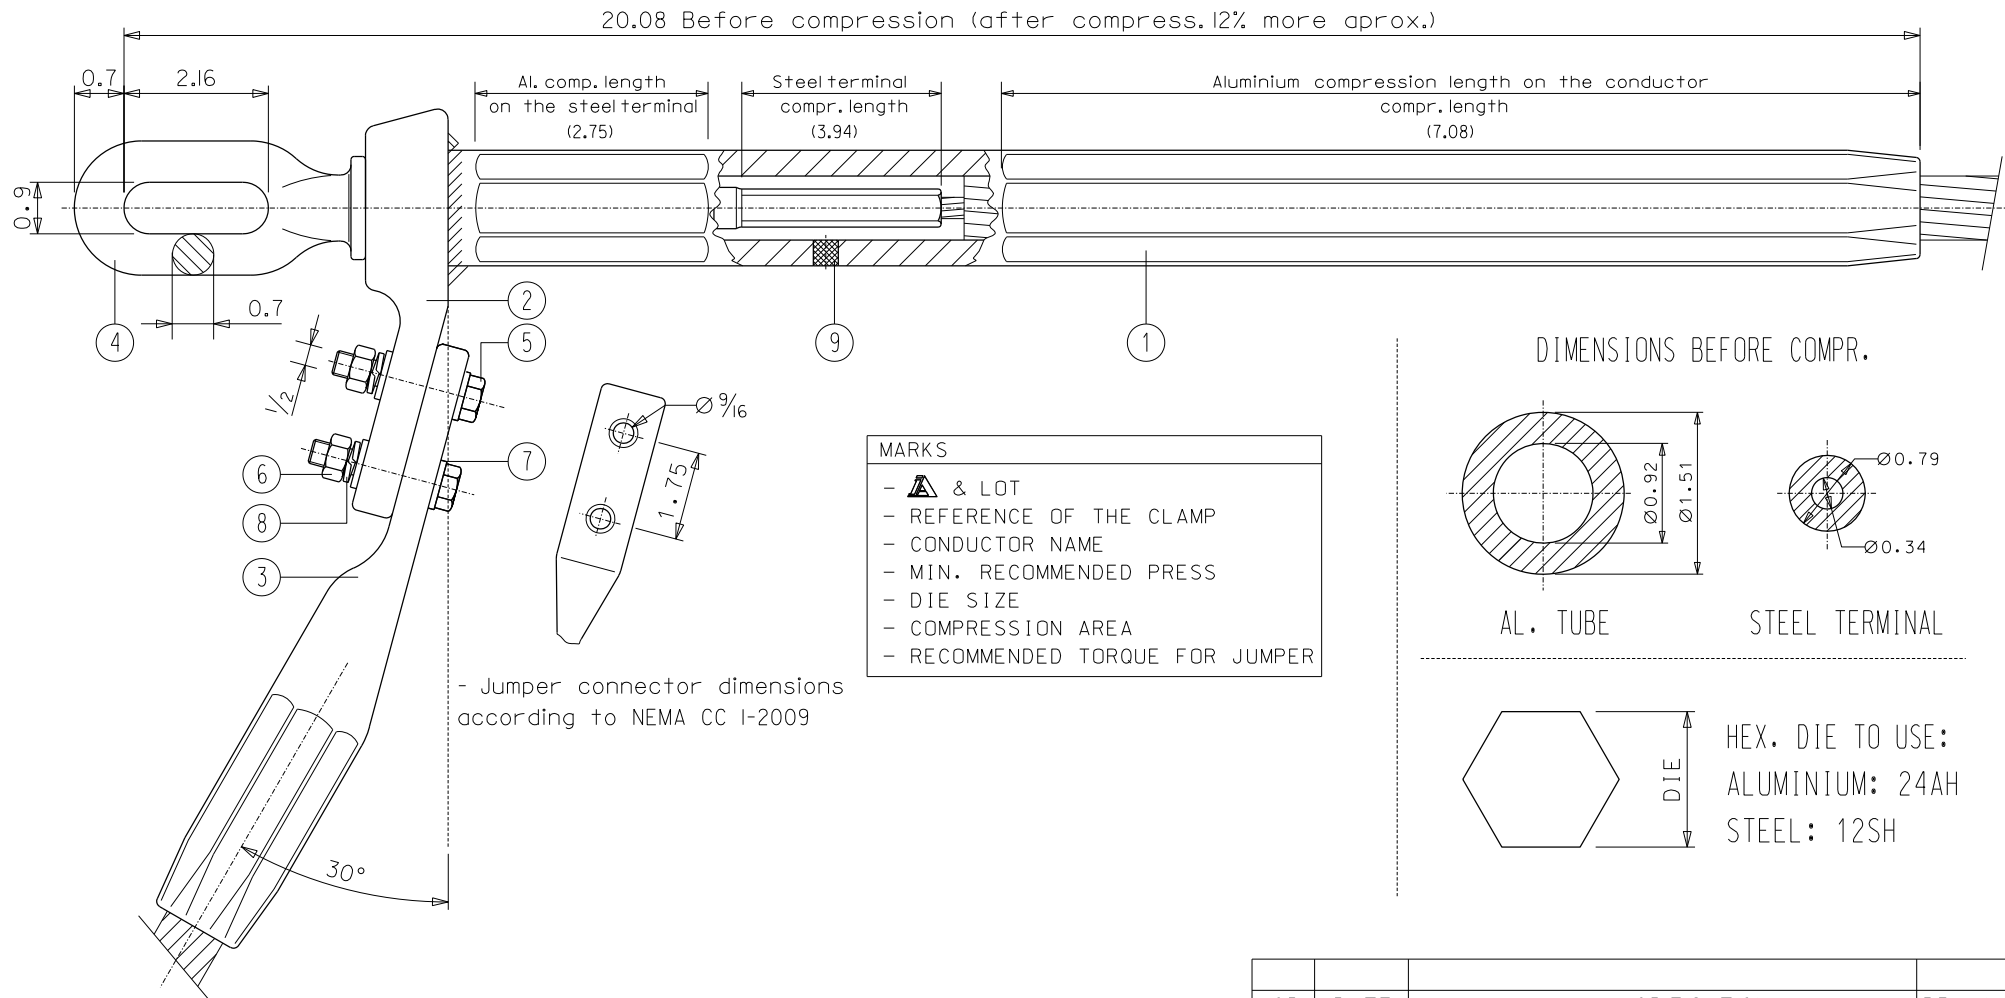

Notes:

- Both sides of the pad are finished to present excellent electrical contact surfaces
- Electrical connection pads will be supplied with a protective covering
- Hot dip galvanized according to ASTM A153
- Tolerances unless otherwise stated to be up to and including 1.4" ±0.027 Over 1.4" ±2%
- All dimensions in inches

9	1	FILLER PLUG	ALUMINIUM
8	2	SPRING LOCK 1/2" ASME B18.21.1	STAINLESS STEEL
7	4	FLAT WASHER 1/2" ASME B18.21.1	STAINLESS STEEL
6	2	HEX NUT 1/2" ASME B18.2.2	STAINLESS STEEL
5	2	BOLT 1/2"x2 ASME B18.2.1	STAINLESS STEEL
4	1	EYE TERMINAL 7440-F	FORGING STEEL GALV.
3	1	JUMPER CONNECTOR DC-38,5	ALUMINIUM
2	1	DEAD END LUG 508-G	ALUMINIUM
1	1	CLAMP BODY	ALUMINIUM
N	QTY	DENOMINATION	MATERIAL

MOD.	DATE	MODIFICATION	DRAWN BY
CODE			
EYE TERMINAL COMPRESSION CLAMP C-280/AM-IX FOR ACSR HAWK CONDUCTOR			
UNIT (inch)		Recomended Torque: 35 f+lb	
Aprox. Weight: 6.65 lb		U.S.: 95% of conductor R.B.S.	
08-09-20	SCALE	DWG No	ISSUE
08-09-20	D/S	C280AMIX	0