



This drawing is property of I. Arruti and must not be copied, exhibited or furnished without the written consent of I. Arruti

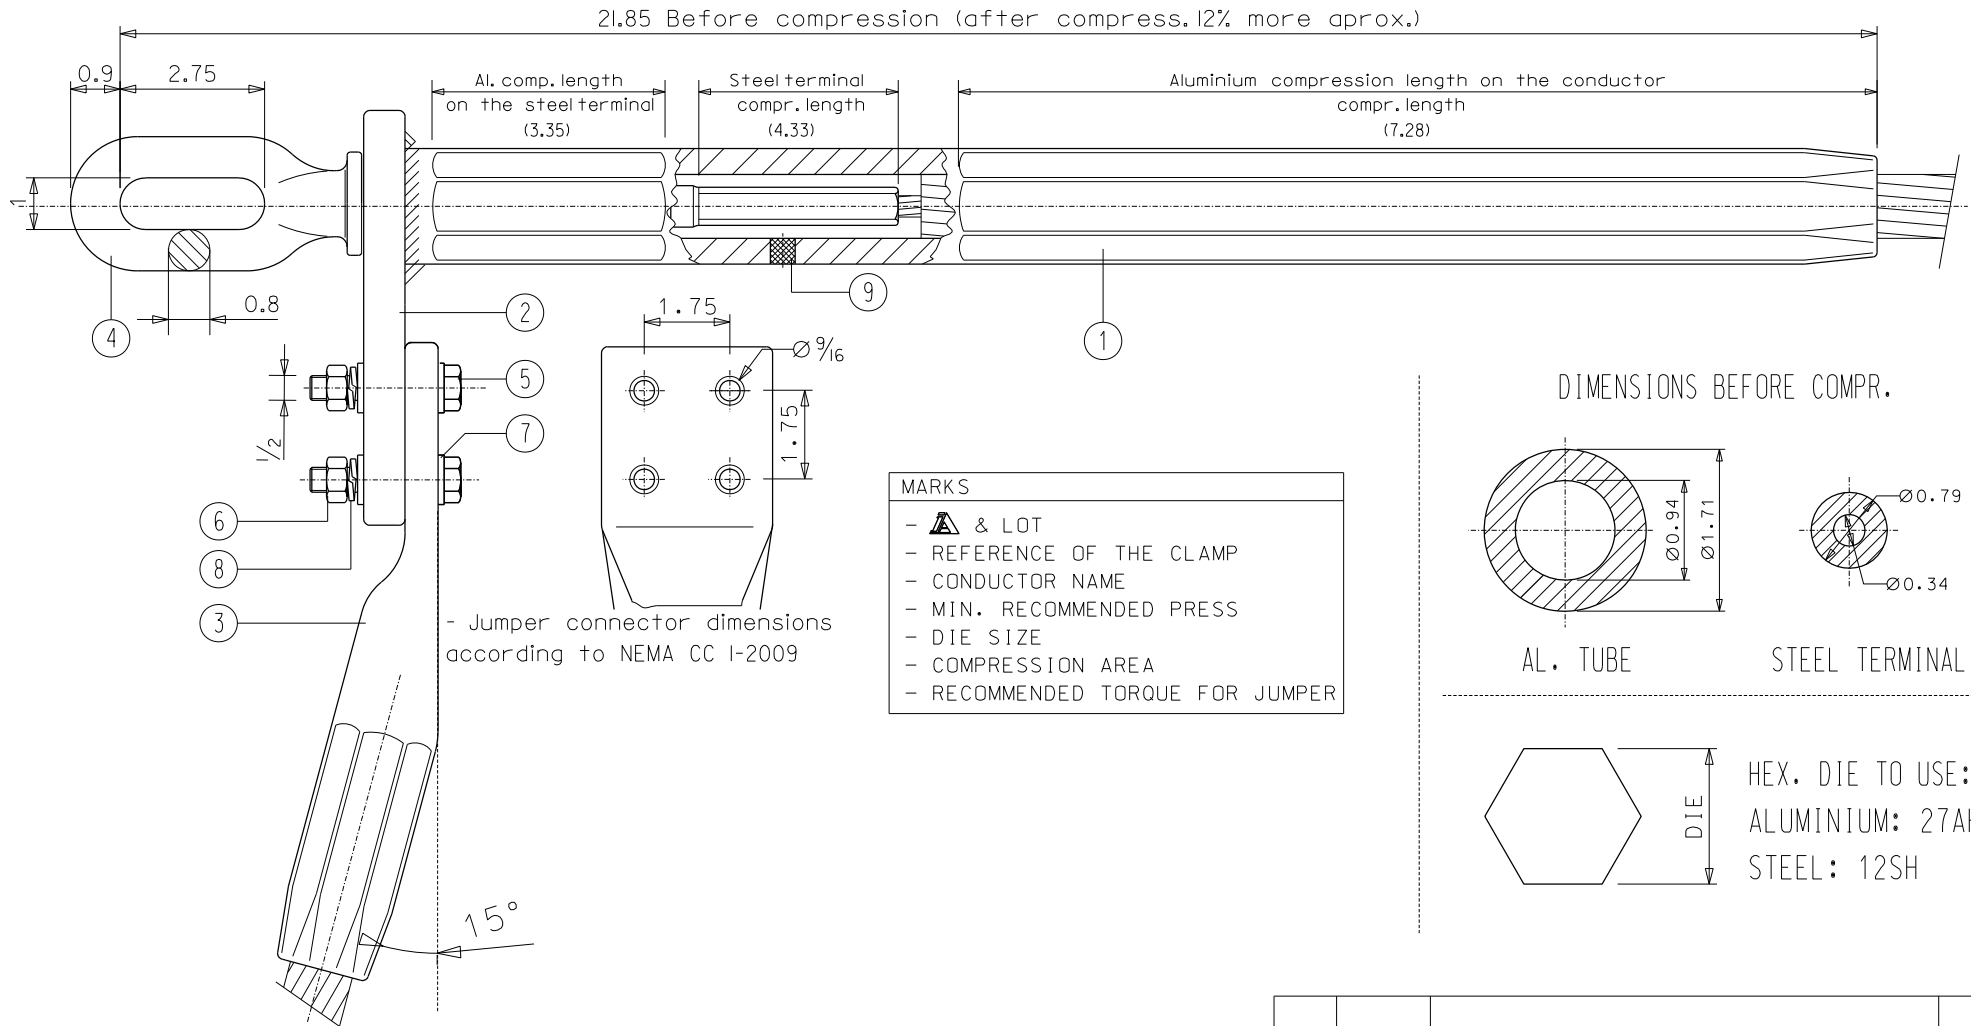

MARKS

- & LOT
- REFERENCE OF THE CLAMP
- CONDUCTOR NAME
- MIN. RECOMMENDED PRESS
- DIE SIZE
- COMPRESSION AREA
- RECOMMENDED TORQUE FOR JUMPER

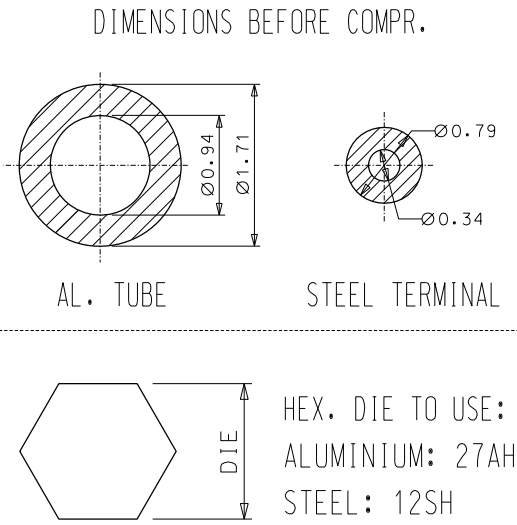

Notes:

- Both sides of the pad are finished to present excellent electrical contact surfaces
- Electrical connection pads will be supplied with a protective covering
- Hot dip galvanized according to ASTM A153
- Tolerances unless otherwise stated to be up to and including 1.4" ±0.027 Over 1.4" ±2%
- All dimensions in inches

QTY	DENOMINATION	MATERIAL
9	1 FILLER PLUG	ALUMINIUM
8	4 SPRING LOCK 1/2" ASME B18.21.I	STAINLESS STEEL
7	8 FLAT WASHER 1/2" ASME B18.21.I	STAINLESS STEEL
6	4 HEX NUT 1/2" ASME B18.2.2	STAINLESS STEEL
5	4 BOLT 1/2"x2.5 ASME B18.2.1	STAINLESS STEEL
4	1 EYE TERMINAL	FORGING STEEL GALV.
3	1 JUMPER CONNECTOR DC-43,5	ALUMINIUM
2	1 DEAD END LUG	ALUMINIUM
1	1 CLAMP BODY	ALUMINIUM

MOD.	DATE	MODIFICATION	DRAWN BY
		CODE	
EYE TERMINAL COMPRESSION CLAMP C-280-SS/AM-IX FOR ACSS HAWK CONDUCTOR			
		UNIT (inch)	Recomended Torque: 35 ftlb
			Aprox. Weight: 8.09 lb
			U.S.: 95% of conductor R.B.S.
F40513	NAME	09-09-20	SCALE
DRAWN	J.E.	09-09-20	DWG No
CHECKED	I.L.	D/S	C280SSAMIX
			ISSUE
			0

ARCHIVO-usccompression