


This drawing is property of I. Arruti and must not be copied, exhibited or furnished without the written consent of I. Arruti

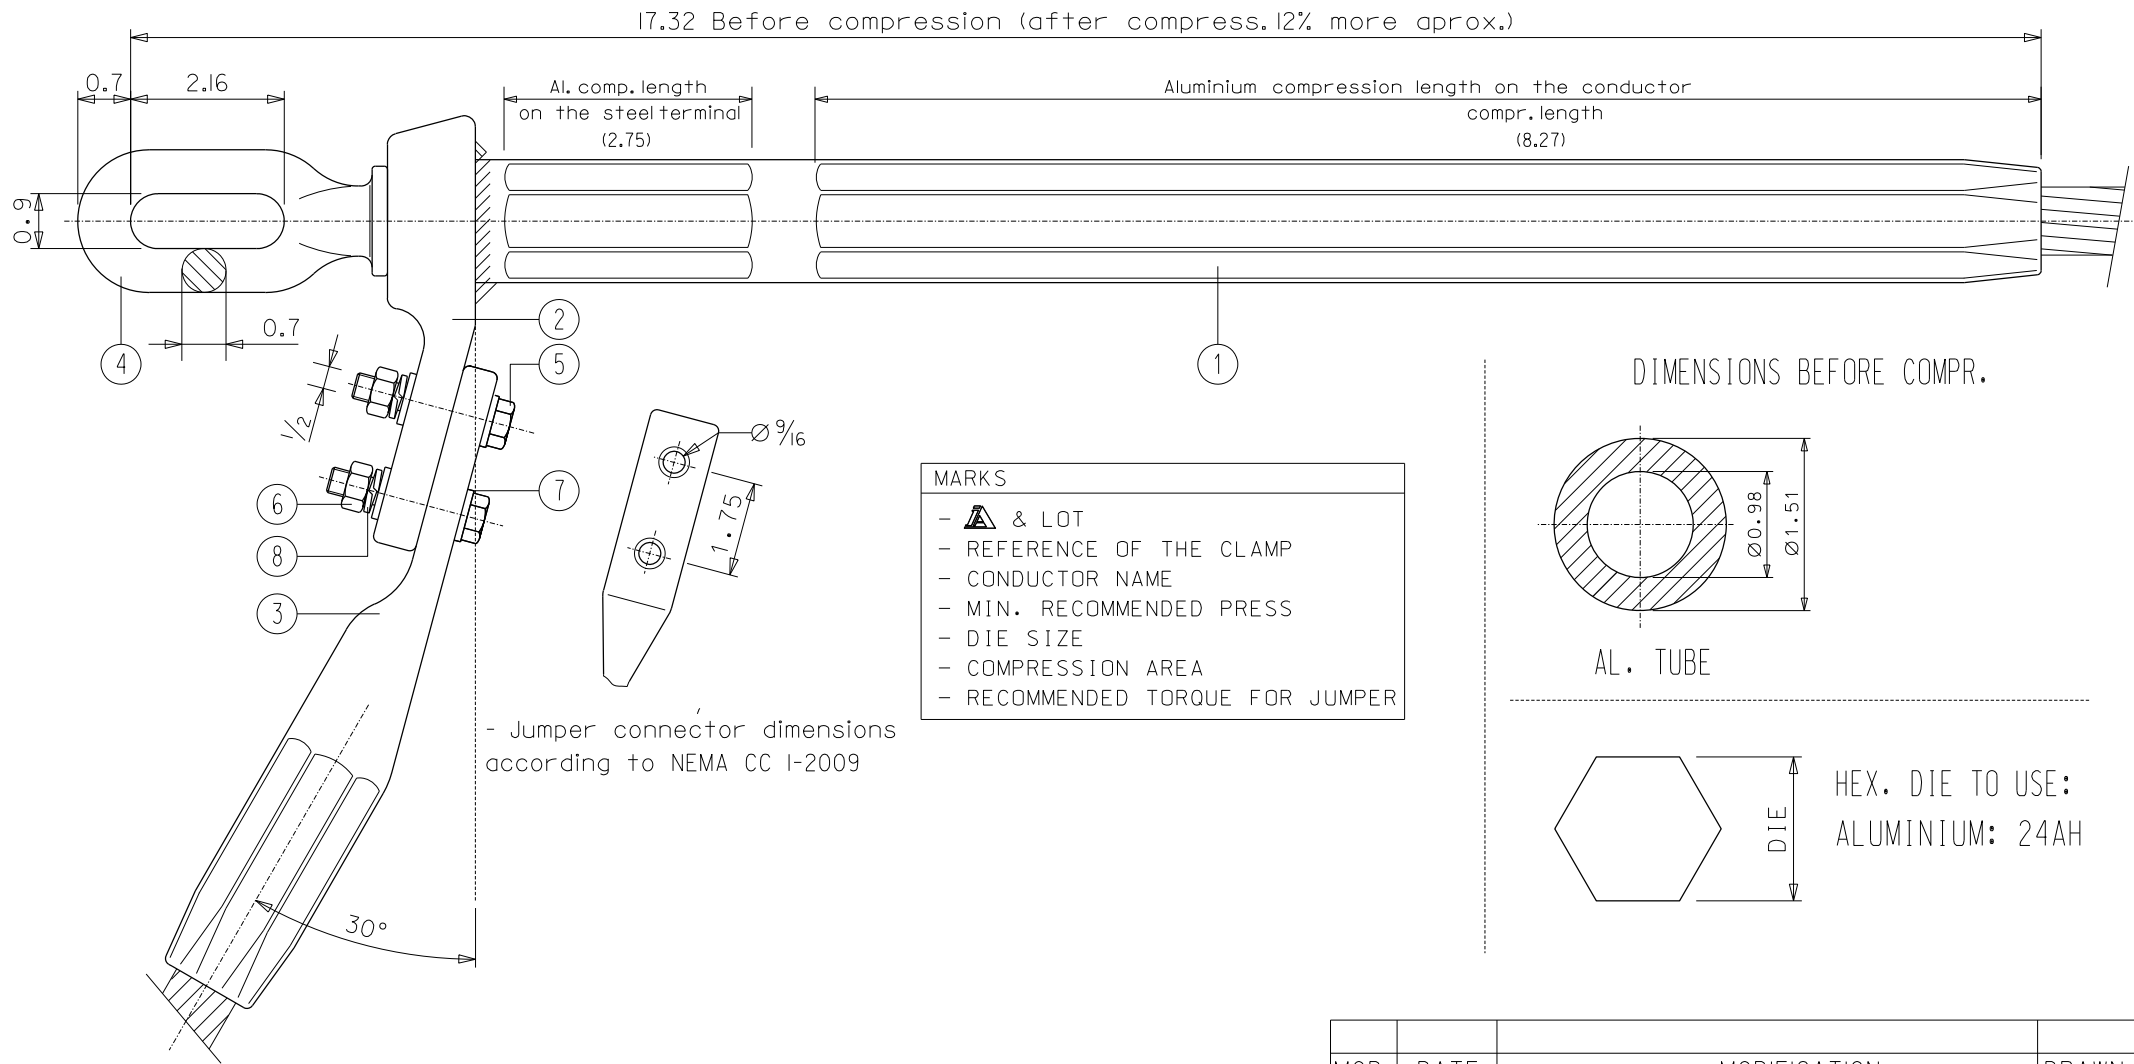

Notes:

- Both sides of the pad are finished to present excellent electrical contact surfaces
- Electrical connection pads will be supplied with a protective covering
- Hot dip galvanized according to ASTM A153
- Tolerances unless otherwise stated to be up to and including 1.4" ±0.027 Over 1.4" ±2%
- All dimensions in inches

N	QTY	DENOMINATION	MATERIAL
8	2	SPRING LOCK 1/2" ASME B18.21.1	STAINLESS STEEL
7	4	FLAT WASHER 1/2" ASME B18.21.1	STAINLESS STEEL
6	2	HEX NUT 1/2" ASME B18.2.2	STAINLESS STEEL
5	2	BOLT 1/2"x2.5 ASME B18.2.1	STAINLESS STEEL
4	1	EYE TERMINAL	FORGING STEEL GALV.
3	1	JUMPER CONNECTOR DC-38,5	ALUMINIUM
2	1	DEAD END LUG	ALUMINIUM
1	1	CLAMP BODY	ALUMINIUM

MOD.	DATE	MODIFICATION		DRAWN BY
		CODE		
		EYE TERMINAL COMPRESSION CLAMP C-322-A/AM-IX FOR AAC ORCHID MCM CONDUCTOR		
		UNIT (inch)	Recomended Torque: 35 ft·lb	
			Aprox. Weight: 5.85 lb	
			U.S.: 95% of conductor R.B.S.	
		F405I3	NAME	
		DRAWN	J.E.	05-05-21
		CHECKED	I.L.	05-05-21
		SCALE	DWG No	ISSUE
		D/S	C322AAMIX	1



ARCHIVO: u.s.a.compression