


This drawing is property of I. Arruti and must not be copied, exhibited or furnished without the written consent of I. Arruti

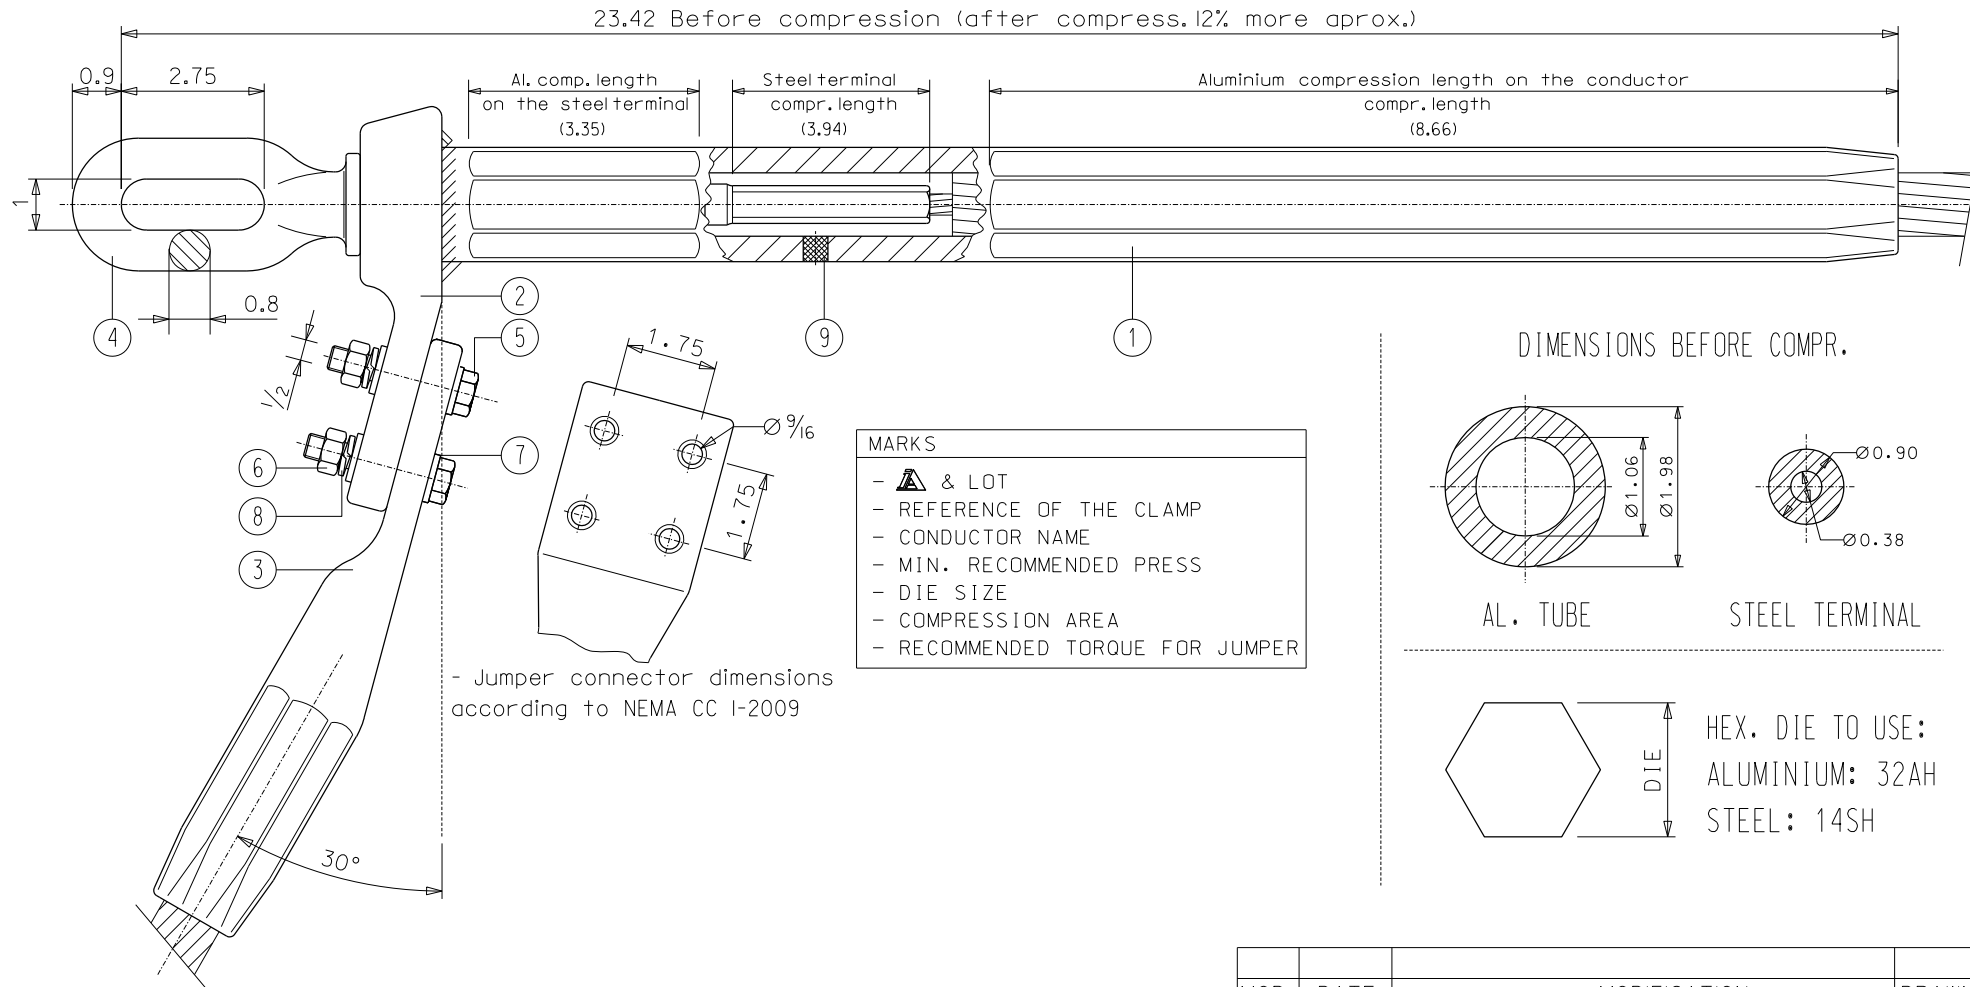

Notes:

- Both sides of the pad are finished to present excellent electrical contact surfaces
- Electrical connection pads will be supplied with a protective covering
- Hot dip galvanized according to ASTM A153
- Tolerances unless otherwise stated to be up to and including 1.4" ±0.027 Over 1.4" ±2%
- All dimensions in inches

9	1	FILLER PLUG	ALUMINIUM
8	4	SPRING LOCK 1/2" ASME B18.21.1	STAINLESS STEEL
7	8	FLAT WASHER 1/2" ASME B18.21.1	STAINLESS STEEL
6	4	HEX NUT 1/2" ASME B18.2.2	STAINLESS STEEL
5	4	BOLT 1/2"x2.5 ASME B18.2.1	STAINLESS STEEL
4	1	EYE TERMINAL 7460-F	FORGING STEEL GALV.
3	1	JUMPER CONNECTOR DC-50,4	ALUMINIUM
2	1	DEAD END LUG	ALUMINIUM
1	1	CLAMP BODY	ALUMINIUM
N	QTY	DENOMINATION	MATERIAL

MOD.	DATE	MODIFICATION				DRAWN BY
		CODE				
		EYE TERMINAL COMPRESSION CLAMP C-356-SS/AM-IX FOR ACSS SQUAB CONDUCTOR				
		UNIT (inch)	Recomended Torque: 35 f+lb			
			Aprox. Weight: 13.20 lb			
			U.S.: 95% of conductor R.B.S.			
DRAWN	J.E.	03-II-20	SCALE	DWG No	ISSUE	
CHECKED	I.L.	03-II-20	D/S	C356SSAMIX	0	

ARCHIVO: usacompression