


This drawing is property of I. Arruti and must not be copied, exhibited or furnished without the written consent of I. Arruti

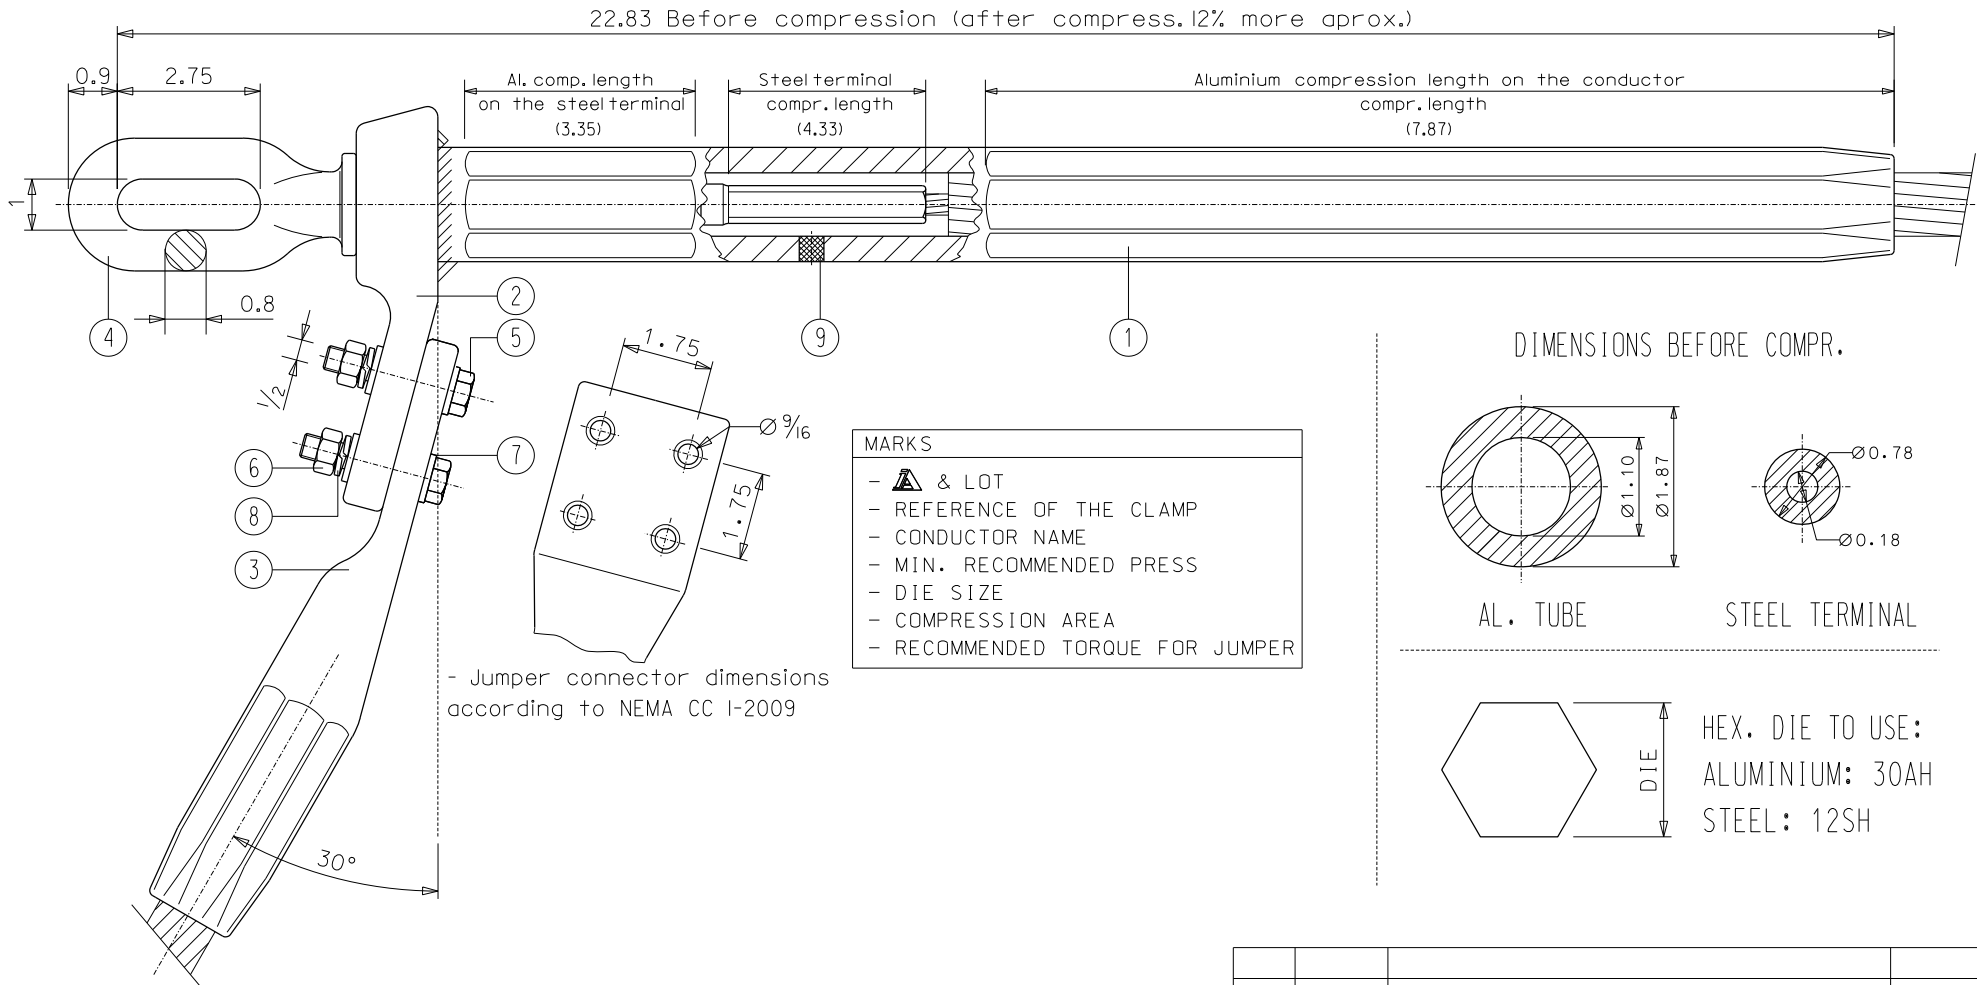

**Notes:**

- Both sides of the pad are finished to present excellent electrical contact surfaces
- Electrical connection pads will be supplied with a protective covering
- Hot dip galvanized according to ASTM A153
- Tolerances unless otherwise stated to be up to and including 1.4" ±0.027. Over 1.4" ±2%
- All dimensions in inches

N	QTY	DENOMINATION	MATERIAL
9	1	FILLER PLUG	ALUMINIUM
8	4	SPRING LOCK 1/2" ASME B18.21.1	STAINLESS STEEL
7	8	FLAT WASHER 1/2" ASME B18.21.1	STAINLESS STEEL
6	4	HEX NUT 1/2" ASME 18.2.2	STAINLESS STEEL
5	4	BOLT 1/2"x2.5 ASME B18.2.1	STAINLESS STEEL
4	1	EYE TERMINAL	FORGING STEEL GALV.
3	1	JUMPER CONNECTOR DC-47,5	ALUMINIUM
2	1	DEAD END LUG	ALUMINIUM
1	1	CLAMP BODY	ALUMINIUM

MOD.	DATE	MODIFICATION	DRAWN BY
 INDUSTRIAS ARRUTI S.A.		CODE	
		EYE TERMINAL COMPRESSION CLAMP C-413/AM-IX FOR ACSR COOT CONDUCTOR	
		UNIT (inch)	Recomended Torque: 35 f+lb
			Aprox. Weight: 12.20 lb
			U.S.: 95% of conductor R.B.S.
DRAWN	J.E.	27-01-22	SCALE
CHECKED	I.L.	27-01-22	DWG No
			ISSUE
		D/S	C413AMIX 0

ARCHIVO:30AH