


This drawing is property of I. Arruti and must not be copied, exhibited or furnished without the written consent of I. Arruti

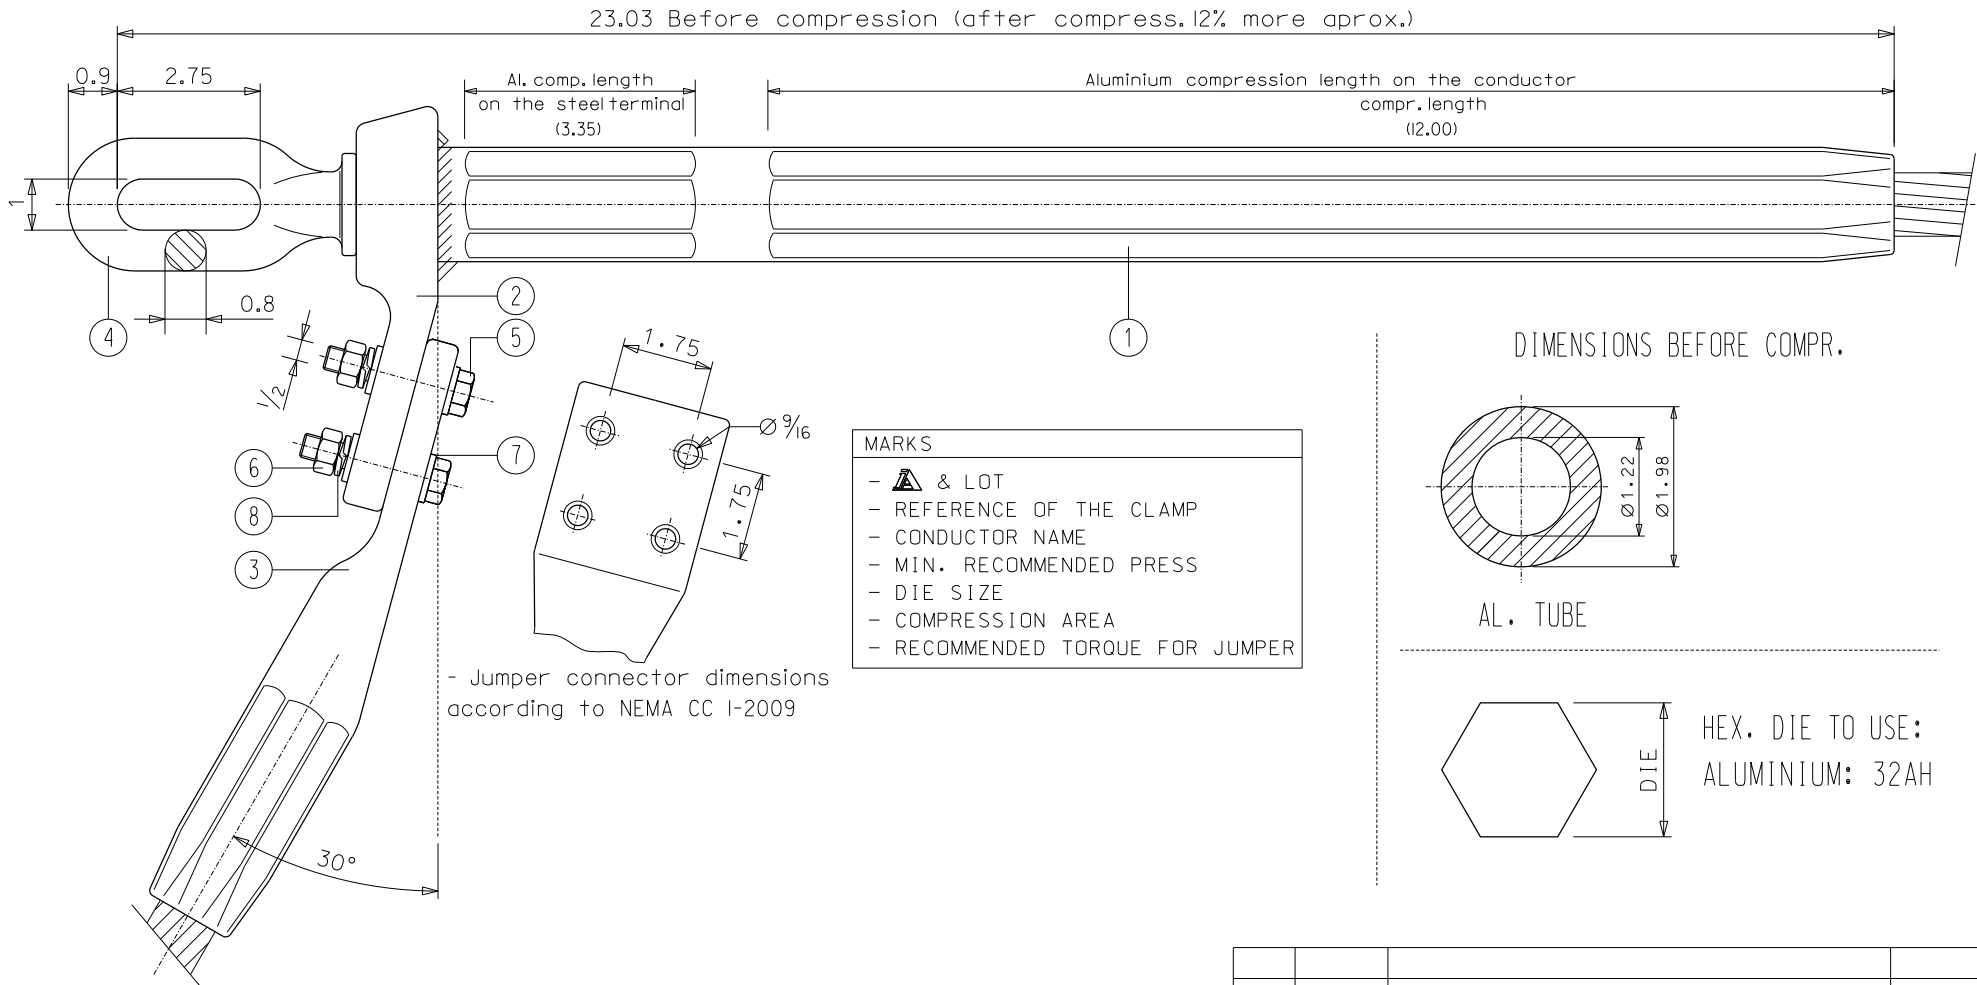

- Jumper connector dimensions according to NEMA CC I-2009

Notes:

- Both sides of the pad are finished to present excellent electrical contact surfaces
- Electrical connection pads will be supplied with a protective covering
- Hot dip galvanized according to ASTM A153
- Tolerances unless otherwise stated to be up to and including 1.4" ±0.027 Over 1.4" ±2%
- All dimensions in inches

| | | | |
|---|-----|--------------------------------|---------------------|
| 8 | 4 | SPRING LOCK 1/2" ASME B18.21.1 | STAINLESS STEEL |
| 7 | 8 | FLAT WASHER 1/2" ASME B18.21.1 | STAINLESS STEEL |
| 6 | 4 | HEX NUT 1/2" ASME B18.2.2 | STAINLESS STEEL |
| 5 | 4 | BOLT 1/2"x2.5 ASME B18.2.1 | STAINLESS STEEL |
| 4 | 1 | EYE TERMINAL 7460-F | FORGING STEEL GALV. |
| 3 | 1 | JUMPER CONNECTOR DC-50,4 | ALUMINIUM |
| 2 | 1 | DEAD END LUG | ALUMINIUM |
| 1 | 1 | CLAMP BODY | ALUMINIUM |
| N | QTY | DENOMINATION | MATERIAL |

| | | | | | |
|---------|------|---|-------------------------------|-----------|----------|
| MOD. | DATE | MODIFICATION | | | DRAWN BY |
| | | CODE | | | |
| | | EYE TERMINAL COMPRESSION CLAMP C-523-A/AM-IX FOR AAC BLUEBELL CONDUCTOR | | | |
| | | UNIT (inch) | Recomended Torque: 35 f+lb | | |
| | | | Aprox. Weight: 11.55 lb | | |
| | | | U.S.: 95% of conductor R.B.S. | | |
| DRAWN | J.E. | 05-05-21 | SCALE | DWG No | ISSUE |
| CHECKED | I.L. | 05-05-21 | D/S | C523AAMIX | 1 |

ARCHIVO:usacompression