




This drawing is property of I. Arruti and must not be copied, exhibited or furnished without the written consent of I. Arruti

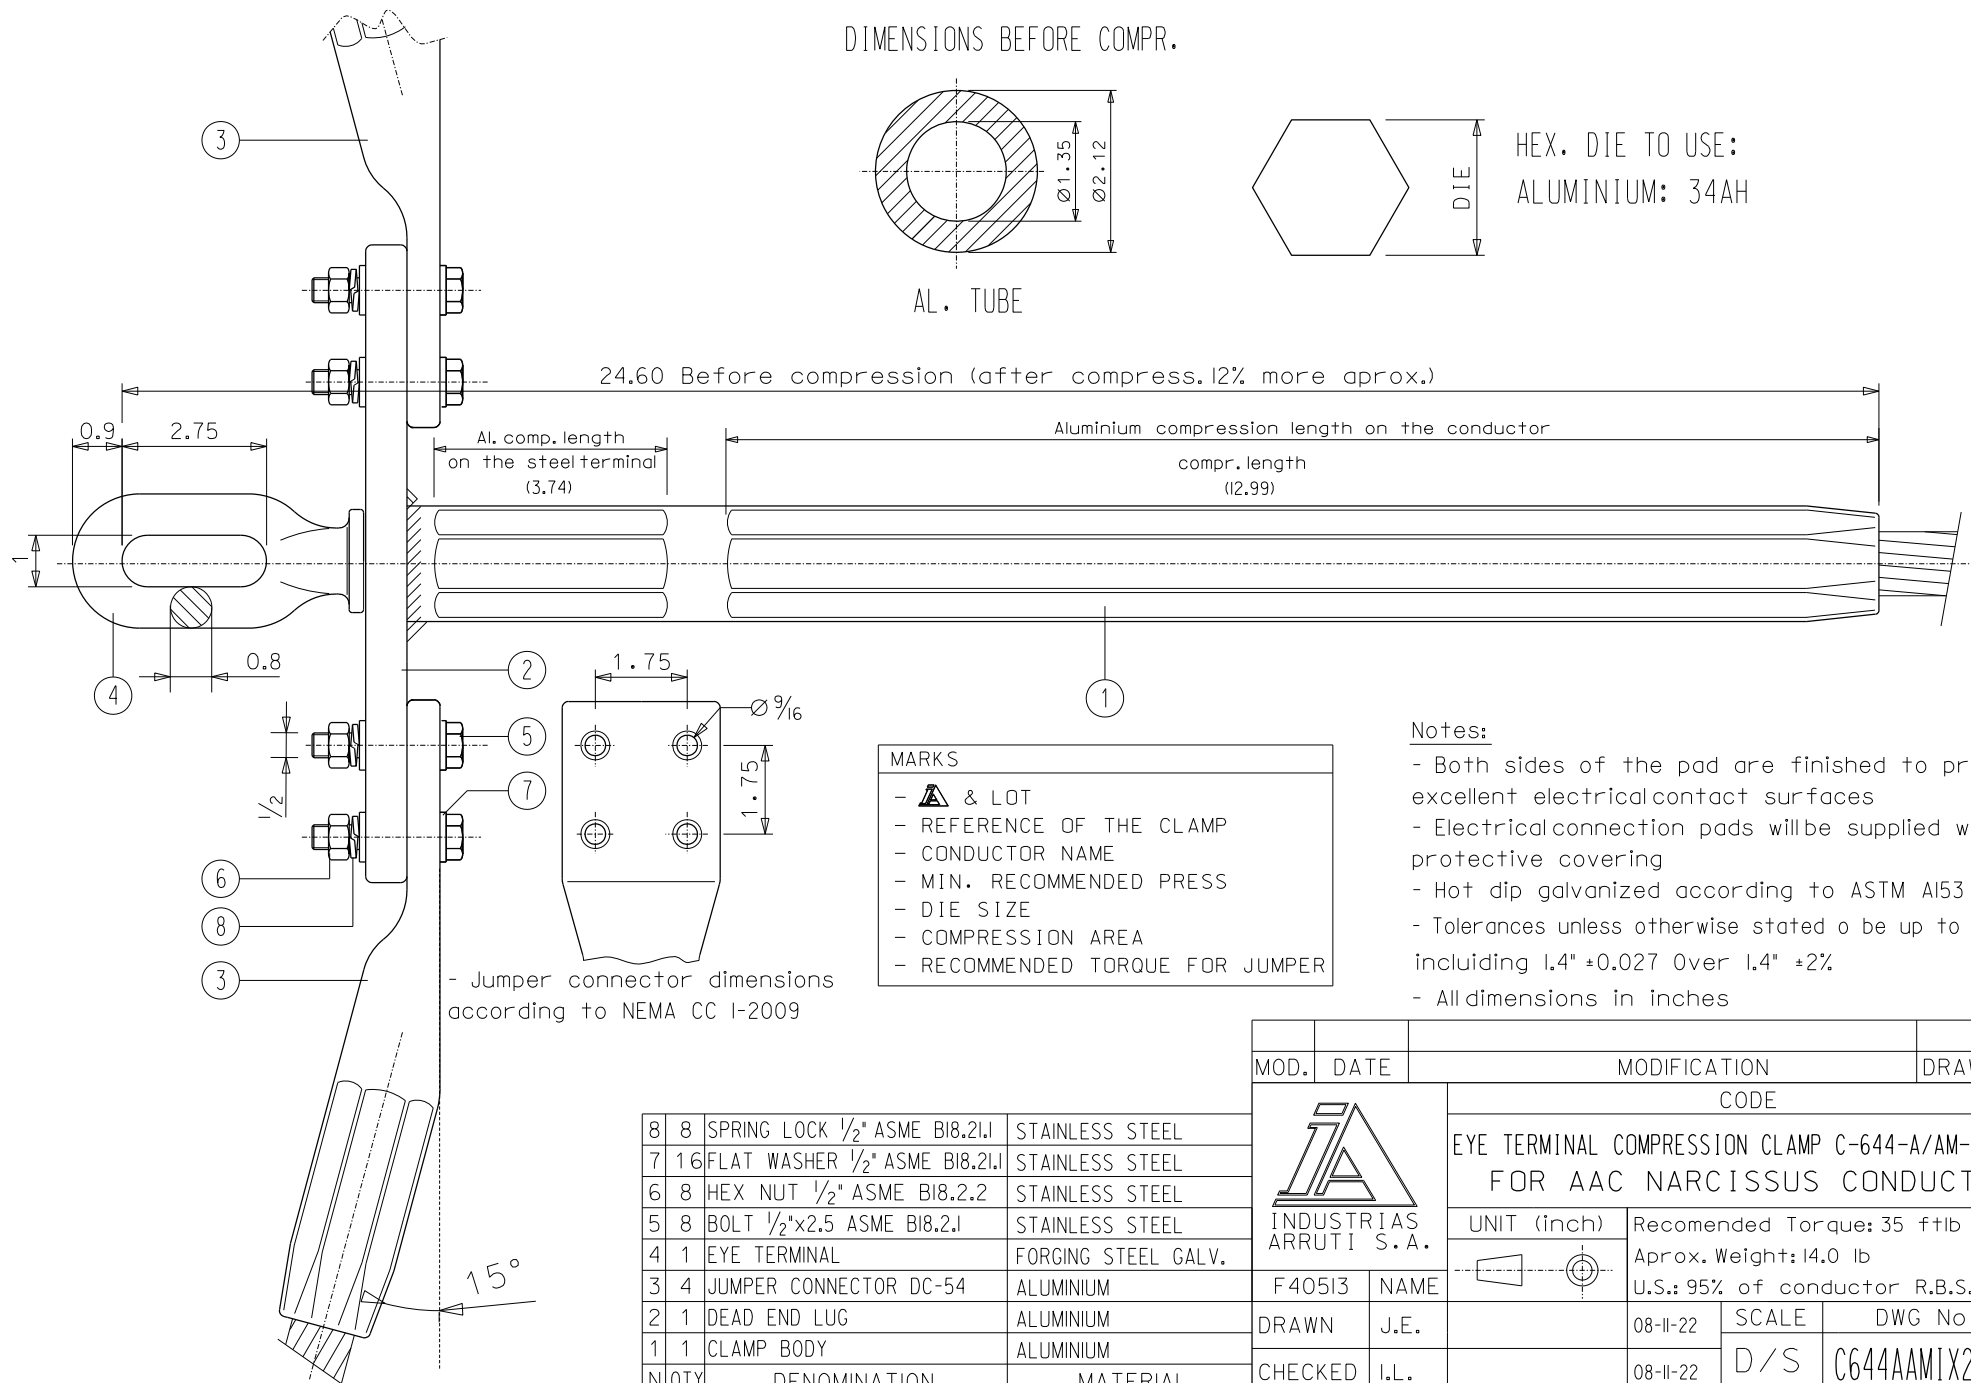

DIMENSIONS BEFORE COMPR.



AL. TUBE



HEX. DIE TO USE:
ALUMINIUM: 34AH

24.60 Before compression (after compress. 12% more aprox.)

Al. comp. length
on the steel terminal
(3.74)

Aluminium compression length on the conductor
compr. length
(12.99)

MARKS


-  & LOT
- REFERENCE OF THE CLAMP
- CONDUCTOR NAME
- MIN. RECOMMENDED PRESS
- DIE SIZE
- COMPRESSION AREA
- RECOMMENDED TORQUE FOR JUMPER

Notes:

- Both sides of the pad are finished to present excellent electrical contact surfaces
- Electrical connection pads will be supplied with a protective covering
- Hot dip galvanized according to ASTM A153
- Tolerances unless otherwise stated to be up to and including 1.4" ±0.027 Over 1.4" ±2%
- All dimensions in inches

- Jumper connector dimensions
according to NEMA CC 1-2009

8	8	SPRING LOCK 1/2" ASME B18.21	STAINLESS STEEL
7	16	FLAT WASHER 1/2" ASME B18.21	STAINLESS STEEL
6	8	HEX NUT 1/2" ASME B18.2.2	STAINLESS STEEL
5	8	BOLT 1/2"x2.5 ASME B18.2.1	STAINLESS STEEL
4	1	EYE TERMINAL	FORGING STEEL GALV.
3	4	JUMPER CONNECTOR DC-54	ALUMINIUM
2	1	DEAD END LUG	ALUMINIUM
1	1	CLAMP BODY	ALUMINIUM
N	QTY	DENOMINATION	MATERIAL

MOD.	DATE	MODIFICATION	DRAWN BY
CODE			
EYE TERMINAL COMPRESSION CLAMP C-644-A/AM-IX/2D FOR AAC NARCISSUS CONDUCTOR			
UNIT (inch)		Recomended Torque: 35 f+lb	
		Aprox. Weight: 14.0 lb	
F40513		NAME	
DRAWN		J.E.	
CHECKED		I.L.	
08-11-22	SCALE	DWG No	ISSUE
08-11-22	D/S	C644AAMIX2D	0