



This drawing is property of I. Arruti and must not be copied, exhibited or furnished without the written consent of I. Arruti

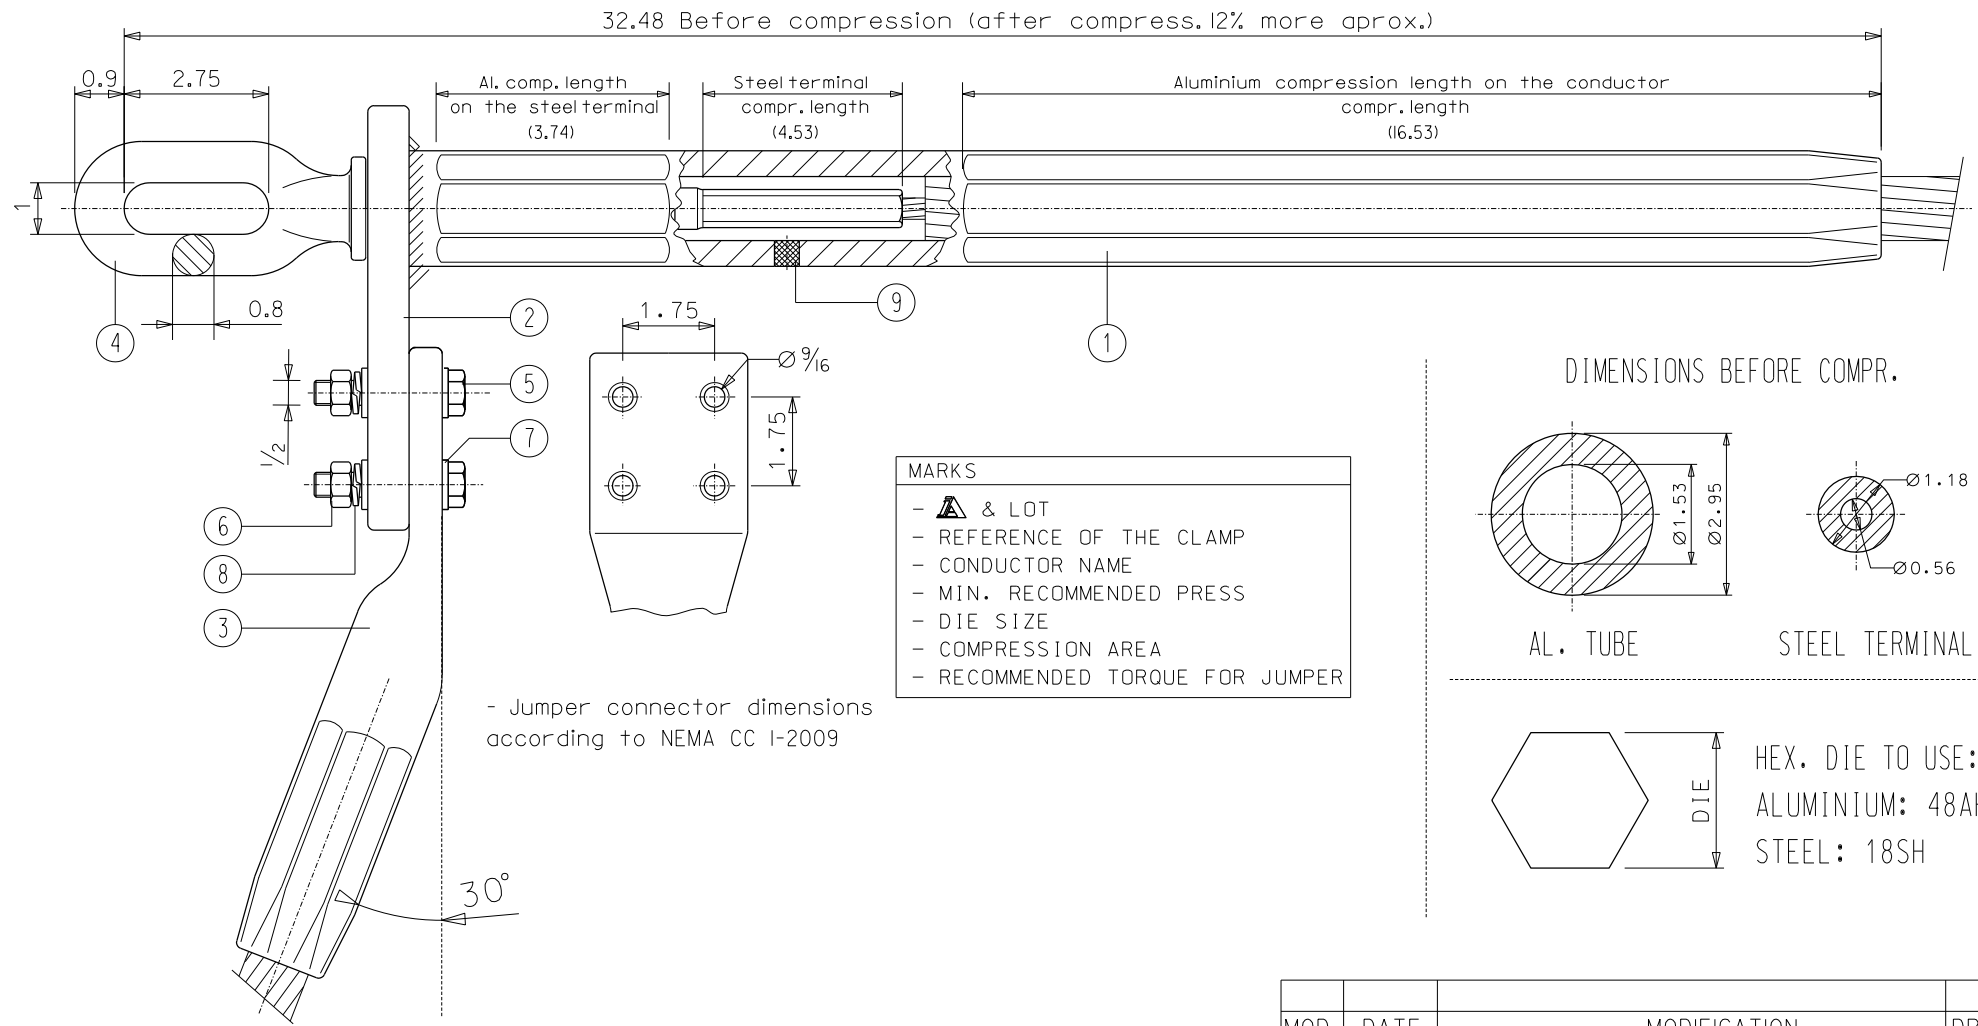

- Jumper connector dimensions according to NEMA CC I-2009

MARKS

- & LOT
- REFERENCE OF THE CLAMP
- CONDUCTOR NAME
- MIN. RECOMMENDED PRESS
- DIE SIZE
- COMPRESSION AREA
- RECOMMENDED TORQUE FOR JUMPER

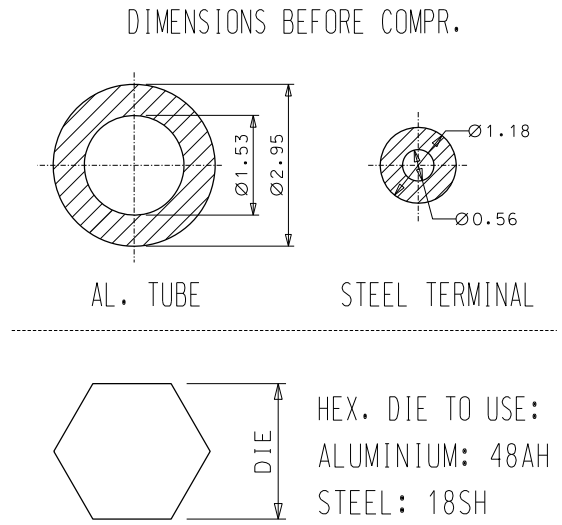

Notes:

- Both sides of the pad are finished to present excellent electrical contact surfaces
- Electrical connection pads will be supplied with a protective covering
- Hot dip galvanized according to ASTM A153
- Tolerances unless otherwise stated to be up to and including 1.4" mm. ±0.7 mm. Over 1.4" mm. ±2%
- All dimensions in inches

| QTY | DENOMINATION | MATERIAL |
|-----|----------------------------------|---------------------|
| 9 | 1 FILLER PLUG | ALUMINIUM |
| 8 | 4 SPRING LOCK 1/2" ASME B18.21.I | STAINLESS STEEL |
| 7 | 8 FLAT WASHER 1/2" ASME B18.21.I | STAINLESS STEEL |
| 6 | 4 HEX NUT 1/2" ASME B18.2.2 | STAINLESS STEEL |
| 5 | 4 BOLT 1/2"x2.5 ASME B18.2.1 | STAINLESS STEEL |
| 4 | 1 EYE TERMINAL | FORGING STEEL GALV. |
| 3 | 1 JUMPER CONNECTOR DC-75 | ALUMINIUM |
| 2 | 1 DEAD END LUG | ALUMINIUM |
| 1 | 1 CLAMP BODY | ALUMINIUM |

| MOD. | DATE | MODIFICATION | DRAWN BY |
|--|--------|--------------|-------------------------------|
| | | CODE | |
| EYE TERMINAL COMPRESSION CLAMP C-931-SS/TW/AM-IX FOR ACSS/TW PECOS CONDUCTOR | | | |
| | | UNIT (inch) | Recomended Torque: 35 ftlb |
| | | | Aprox. Weight: 27.0 lb |
| | | | U.S.: 95% of conductor R.B.S. |
| INDUSTRIAS ARRUTI S.A. | F40513 | NAME | |
| DRAWN | J.E. | | 09-09-20 |
| CHECKED | I.L. | | 09-09-20 |
| | | SCALE | DWG No |
| | | D/S | C931SSTWAMIX |
| | | | ISSUE |
| | | | 0 |

ARCHIVO-usocompression