




Industrias Arruti


## BIRD WARNING

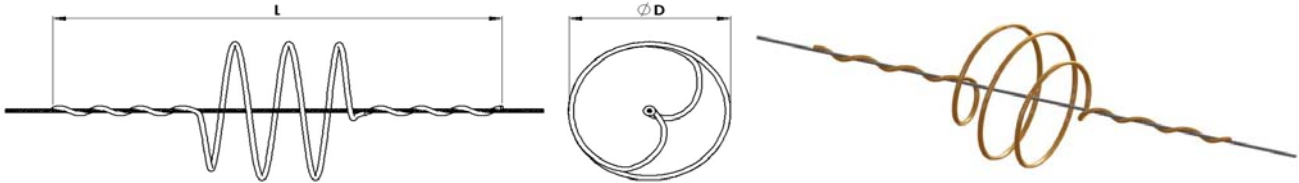

Material: Rigid PVC.

Reference	Ø Conductor		Ø Rod (inch)	Dimensions (inch)		Colour	Sliding load (lb)	Weight (lb)
	Min.	Max.		L	D			
DAA-7/9,50/AM	0,28	0,37	0.47±0.01	39,37 (31.50 when idle)	13,78	YELLOW	55	1,32
DAA-7/9,50/AM	0,28	0,37	0.47±0.01	39,37 (31.50 when idle)	13,78	ORANGE	55	1,32
DAA-9,51/13,40/AM	0,37	0,53	0.47±0.01	39,37 (31.50 when idle)	13,78	YELLOW	55	1,32
DAA-9,51/13,40/AM	0,37	0,53	0.47±0.01	39,37 (31.50 when idle)	13,78	ORANGE	55	1,32
DAA-13,41/17,50/AM	0,53	0,69	0.47±0.01	39,37 (31.50 when idle)	13,78	YELLOW	55	1,32
DAA-13,41/17,50/AM	0,53	0,69	0.47±0.01	39,37 (31.50 when idle)	13,78	ORANGE	55	1,32
DAA-17,51/21,80/AM	0,69	0,86	0.47±0.01	39,37 (31.50 when idle)	13,78	YELLOW	55	1,32
DAA-17,51/21,80/AM	0,69	0,86	0.47±0.01	39,37 (31.50 when idle)	13,78	ORANGE	55	1,32

NOTE: Other PVC colours upon request.

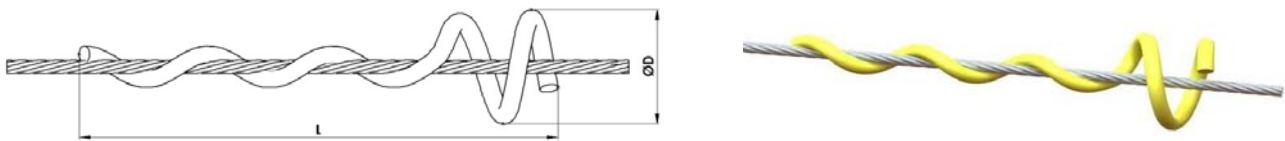

Reference	Ø Conductor		Ø Rod (inch)	Dimensions (inch)		Colour	Sliding load (lb)	Weight (lb)
	Min.	Max.		L	D			
DAAS-7/9,50/AM	0,28	0,37	0.47±0.01	11,81	2,76	YELLOW	55	0,24
DAAS-7/9,50/AM	0,28	0,37	0.47±0.01	11,81	2,76	GREY	55	0,24
DAAS-9,51/13,40/AM	0,37	0,53	0.47±0.01	11,81	2,76	YELLOW	55	0,24
DAAS-9,51/13,40/AM	0,37	0,53	0.47±0.01	11,81	2,76	GREY	55	0,24
DAAS-13,41/17,50/AM	0,53	0,69	0.47±0.01	14,96	4,13	YELLOW	55	0,33
DAAS-13,41/17,50/AM	0,53	0,69	0.47±0.01	14,96	4,13	GREY	55	0,33
DAAS-17,51/21,80/AM	0,69	0,86	0.47±0.01	14,96	4,13	YELLOW	55	0,33
DAAS-17,51/21,80/AM	0,69	0,86	0.47±0.01	14,96	4,13	GREY	55	0,33