




Industrias Arruti

05. BOLTED STRAIN CLAMPS FOR ALUMOWELD CABLES

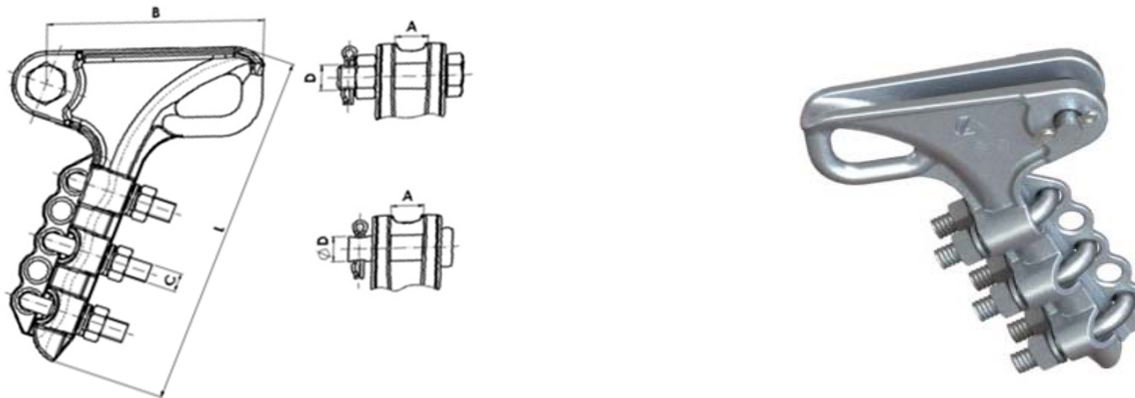

Reference	Figure	Ø Conductor (inch)		Dimensions (inch)					U-Bolts	Tightening	Ultimate strength	Weight
		Min.	Max.	A	B	C	D	L	Nº	Torque (ftlb)	(lb)	(lb)
GA-1-PE/AM	Fig.2	0,16	0,47	0,71	3,15	3/8	3/8	4,72	2	220	8.000	0,95
GA-1/AM	Fig.2	0,16	0,47	0,71	4,92	1/2	1/2	6,1	2	310	9.000	1,52
GA-1T/AM	Fig.1	0,16	0,47	0,71	4,92	1/2	1/2	6,1	2	310	9.000	1,54
GA-2/AM	Fig.2	0,39	0,63	0,79	5,3	1/2	1/2	8,78	3	400	15.000	2,51
GA-2T/AM	Fig.1	0,39	0,63	0,79	5,3	1/2	1/2	8,78	3	400	15.000	2,6
GA-2-L/AM	Fig.2	0,35	0,71	0,71	7,87	1/2	1/2	11,02	3	400	15.000	3,44
GA-2T-L/AM	Fig.1	0,35	0,71	0,71	7,87	1/2	1/2	11,02	3	400	15.000	3,55

Bolt: ASTM A325

Nuts: ASTM A563

Lockin pins: Stainless steel

Material: Body: Alloy A1. EN-1706 (similar to ASTM A413.0)

Steel parts finish: Hot dip galvanising ASTM A153

NOTE: The clamps can be provided with stainless steel fasteners (except connection screw to fitting string).

Other kinds of fasteners upon request.