




Industrias Arruti

PREFORMED CLAMPS FOR ADSS CABLES

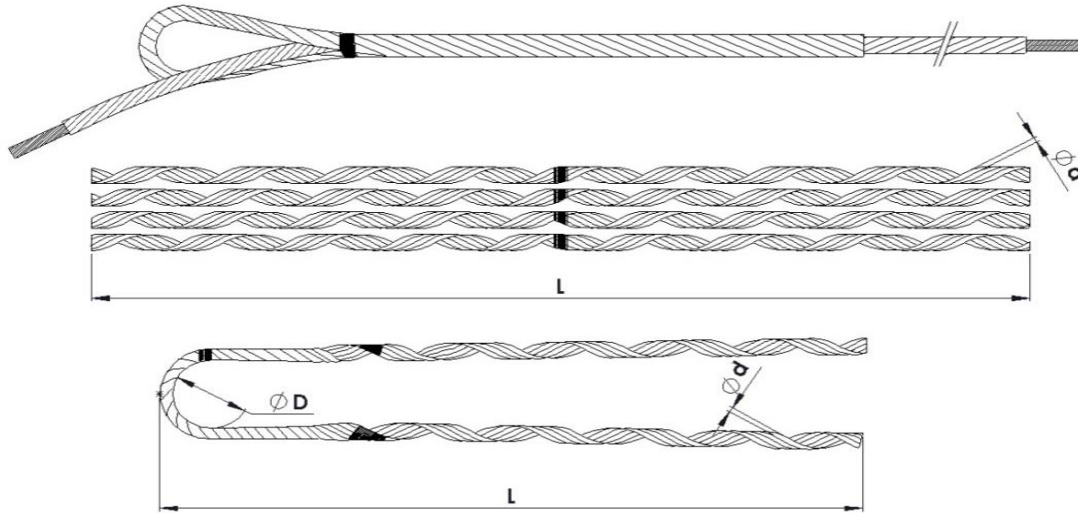

Application: Self-supporting fibre optic cables.
 Material: Retention: Steel covered in Aluminium. Protection joint: Alloy aluminium.

| Reference | Ø Conductor (inch) | | Dimensions (inch) | | | Nº Armour rods | Identification colour | Ultimate strength (lb) |
|-------------------|--------------------|------|-------------------|------------|-------|----------------|-----------------------|------------------------|
| | Min. | Max. | Ø d (Rods) | Ø D (Loop) | L | | | |
| RAAW FO 17/D | 0,42 | 0,46 | 0,16 | 2,48 | 47,24 | 4 | BLACK | 5.000 |
| EPAL FO 11/I/2500 | | | 0,14 | | 78,74 | (4+4+4) | YELLOW | |
| RAAW FO 19/D | 0,46 | 0,5 | 0,16 | 2,48 | 54,33 | 6 | YELLOW | 13.500 |
| EPAL FO 12/I/2500 | | | 0,14 | | 98,43 | (4+4+3) | RED | |
| RAAW FO 20/D | 0,5 | 0,52 | 0,16 | 2,48 | 54,33 | 6 | BLACK | 22.000 |
| EPAL FO 13/I/2500 | | | 0,14 | | 98,43 | (4+4+4) | YELLOW | |
| RAAW FO 21/D | 0,53 | 0,56 | 0,16 | 2,48 | 54,33 | 7 | RED | 27.000 |
| EPAL FO 14/I/2500 | | | 0,14 | | 98,43 | (4+3+3+3) | RED | |
| RAAW FO 21,5/D | 0,57 | 0,6 | 0,16 | 2,48 | 54,33 | 7 | GREEN | 28.000 |
| EPAL FO 15/I/2500 | | | 0,14 | | 98,43 | (4+3+3+3) | BLUE | |
| RAAW FO 23,5/D | 0,61 | 0,64 | 0,16 | 2,48 | 54,33 | 7 | YELLOW | 29.000 |
| EPAL FO 16/I/2500 | | | 0,15 | | 98,43 | (4+4+3+3) | GREEN | |
| RAAW FO 24,5/D | 0,65 | 0,68 | 0,16 | 2,48 | 54,33 | 7 | RED | 30.000 |
| EPAL FO 17/I/2500 | | | 0,15 | | 98,43 | (4+4+4+3) | BLACK | |
| RAAW FO 25,5/D | 0,69 | 0,72 | 0,16 | 2,48 | 54,33 | 7 | BLACK | 30.000 |
| EPAL FO 18/I/2500 | | | 0,15 | | 98,43 | (4+4+4+3) | RED | |
| RAAW FO 26,5/D | 0,73 | 0,77 | 0,16 | 2,48 | 54,33 | 7 | BLUE | 30.000 |
| EPAL FO 19/I/2500 | | | 0,15 | | 98,43 | (4+4+4+4) | YELLOW | |
| RAAW FO 27,5/D | 0,78 | 0,83 | 0,18 | 2,48 | 54,33 | 8 | BLACK | 33.700 |
| EPAL FO 20/I/2500 | | | 0,15 | | 98,43 | (5+4+4+4) | BLACK | |

NOTE: State the direction of the retention wiring, which will be similar to that of the cable. Code according to direction of wiring
 Retentions for other conductor Ø upon request.