PREFORMED CLAMPS FOR ALUMOWELD CONDUCTORS

THIMBLE + PREFORMED RODS

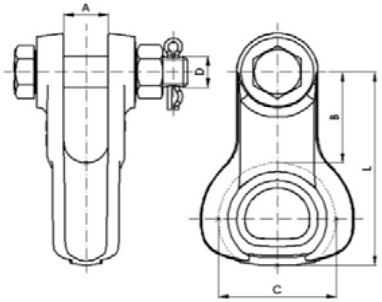

+

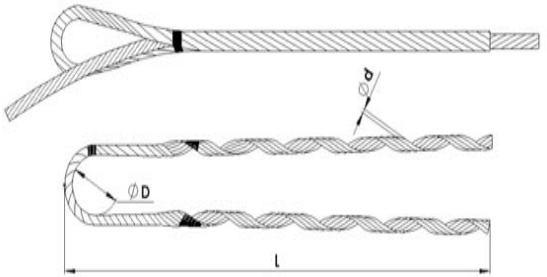

Material: Nodular cast EN-1563 (similar to ASTM A536). Locking Pin: Stainless Steel (AISI 304)
Steel parts finish: Hot dip galvanising ASTM A153. Bolt: ASTM A325. Nut: ASTM A563.

Reference	Dimensions (inch)					Ultimate strength	Weight
	A	B	C	D	L	(lb)	(lb)
G-16/AM	7/8	1-55/64	2-9/32	5/8	3-15/16	28,000	1.70

Application: Steel conductors covered in aluminium.
Material: Steel covered in Aluminium.

Reference	Ø Conductor (inch)		Dimensions (inch)			Nº Armour	Identification colour	Ultimate strength
	Min.	Max.	Ø d (Rods)	Ø D (Loop)	L	rods		(lb)
RAAW 065-070	0.256	0.275	0.102	1.97	26.77	5	YELLOW	10,000
RAAW 070-074	0.276	0.291	0.102	1.97	26.77	5	WHITE	10,000
RAAW 074-078	0.292	0.306	0.102	1.97	26.77	5	BLACK	10,000
RAAW 078-085	0.307	0.334	0.102	2.36	28.74	5	RED	11,240
RAAW 085-089	0.335	0.352	0.115	2.36	30.71	5	BLUE	12,100
RAAW 089-093	0.353	0.366	0.102	2.36	30.71	6	ORANGE	16,500
RAAW 093-097	0.367	0.381	0.102	2.36	30.71	6	WHITE	16,500
RAAW 097-101	0.382	0.396	0.128	2.36	31.50	5	GREEN	14,300
RAAW 101-108	0.397	0.425	0.128	2.36	31.50	5	RED	18,200
RAAW 108-112	0.426	0.440	0.128	2.36	34.25	6	BLUE	18,200
RAAW 112-118	0.441	0.464	0.144	2.36	37.00	5	GREEN	22,000
RAAW 118-125	0.465	0.492	0.144	2.36	37.00	5	BLACK	22,000

NOTE: State the direction of the retention wiring, which will be similar to that of the cable. Code according to direction of wiring.
Retentions for other conductor Ø upon request.

Industrias Arruti