


This drawing is property of I. Arruti and must not be copied, exhibited or furnished without the written consent of I. Arruti

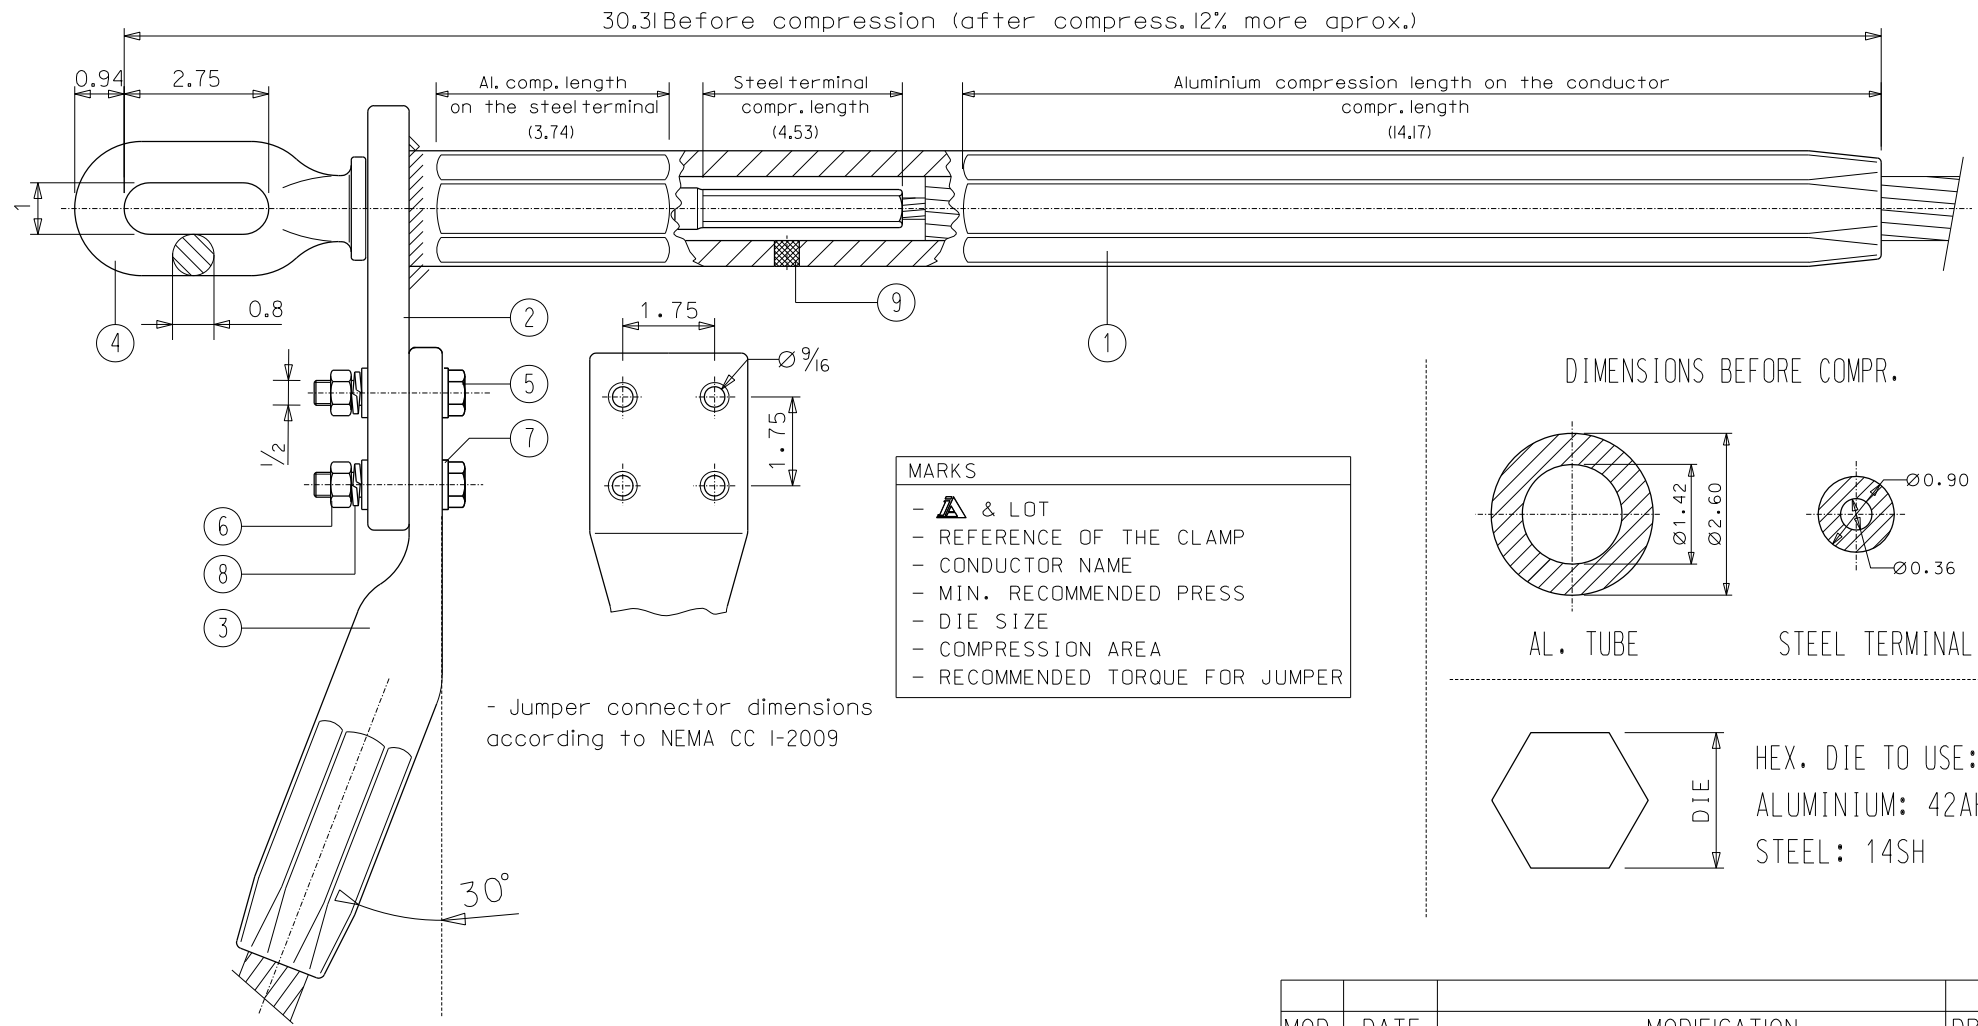

- Jumper connector dimensions according to NEMA CC I-2009

- Notes:**
- Both sides of the pad are finished to present excellent electrical contact surfaces
 - Electrical connection pads will be supplied with a protective covering
 - Hot dip galvanized according to ASTM A153
 - Tolerances unless otherwise stated to be up to and including 1.4" mm. ±0.7 mm. Over 1.4" mm. ±2%
 - All dimensions in inches

| | | | |
|-----|---|------------------------------|---------------------|
| 9 | 1 | FILLER PLUG | ALUMINIUM |
| 8 | 4 | SPRING LOCK 1/2" ASME B18.21 | STAINLESS STEEL |
| 7 | 8 | FLAT WASHER 1/2" ASME B18.21 | STAINLESS STEEL |
| 6 | 4 | HEX NUT 1/2" ASME B18.2.2 | STAINLESS STEEL |
| 5 | 4 | BOLT 1/2"x2.5 ASME B18.2.1 | STAINLESS STEEL |
| 4 | 1 | EYE TERMINAL 7470-F | FORGING STEEL GALV. |
| 3 | 1 | JUMPER CONNECTOR DC-66 | ALUMINIUM |
| 2 | 1 | DEAD END LUG | ALUMINIUM |
| 1 | 1 | CLAMP BODY | ALUMINIUM |
| QTY | | DENOMINATION | MATERIAL |

| | | | | |
|----------------------------|------|--|----------------------------|----------|
| MOD. | DATE | MODIFICATION | | DRAWN BY |
| INDUSTRIAS ARRUTI S.A. | | CODE | | |
| | | EYE TERMINAL COMPRESSION CLAMP C-689-SS/AM-IX FOR ACSS BITTERN CONDUCTOR | | |
| | | UNIT (inch) | Recomended Torque: 35 ftlb | |
| | | Aprox. Weight: 19.80 lb | | |
| | | U.S.: 95% of conductor R.B.S. | | |
| DRAWN | E.V. | 29-03-23 | SCALE | DWG No |
| CHECKED | I.L. | 29-03-23 | D/S | ISSUE |
| | | | C689SSAMIX | 0 |

ARCHIVO:42.dh