


PREFORMED SPLICES FOR GALVANISED STEEL CONDUCTORS

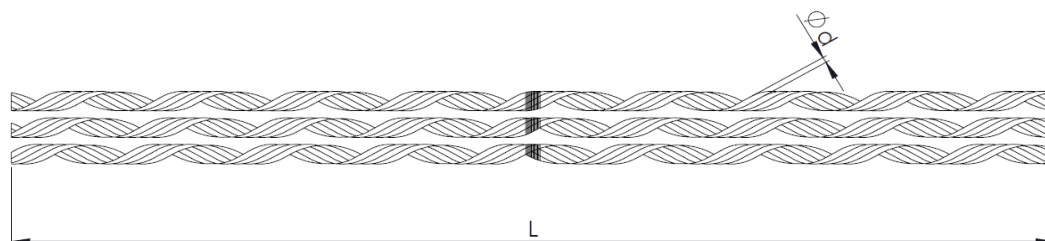

Application: Galvanised steel conductors.

Material: Hot dip galvanising ASTM A153.

Reference	Ø Conductor (inch)		Dimensions (inch)		Nº Armour rods	Identification colour	Ultimate strength (lb)
	Min.	Max.	Ø d (Rods)	L			
ETMAC 039-042	0.156	0.167	0.070	23.62	4+4	ORANGE	3,300
ETMAC 042-046	0.168	0.180	0.070	25.98	4+4	RED	4,000
ETMAC 046-049	0.181	0.190	0.086	27.36	4+4	GREEN	4,700
ETMAC 049-054	0.191	0.212	0.070	28.35	4+5	BLACK	5,200
ETMAC 054-058	0.213	0.226	0.070	29.92	5+5	BLUE	6,000
ETMAC 059-062	0.235	0.243	0.086	33.07	5+5	YELLOW	7,200
ETMAC 062-065	0.244	0.255	0.086	33.86	5+5	WHITE	7,800
ETMAC 065-070	0.256	0.275	0.086	36.22	5+5	RED	8,400
ETMAC 070-073	0.276	0.287	0.086	36.22	5+5	RED	8,400
ETMAC 073-077	0.288	0.303	0.100	38.19	5+5	BLACK	10,500
ETMAC 079-083	0.313	0.326	0.100	40.16	3+4+4	GREEN	10,500
ETMAC 083-089	0.327	0.352	0.100	42.52	3+4+4	BLUE	11,000
ETMAC 089-093	0.353	0.366	0.100	44.88	4+4+4	ORANGE	15,500
ETMAC 093-097	0.367	0.381	0.100	46.06	4+4+4	WHITE	16,000
ETMAC 097-101	0.382	0.396	0.119	47.24	3+4+4	YELLOW	16,500
ETMAC 101-104	0.397	0.411	0.119	50.39	3+4+4	BLAK	17,500
ETMAC 104-108	0.412	0.425	0.119	53.15	4+4+4	GREEN	20,000
ETMAC 108-112	0.426	0.440	0.119	53.94	4+4+4	BLUE	20,000
ETMAC 112-117	0.441	0.460	0.119	55.91	4+4+4	WHITE	21,000
ETMAC 117-121	0.461	0.476	0.138	57.87	3+4+4	RED	23,100
ETMAC 121-125	0.477	0.492	0.138	62.20	3+4+4	ORANGE	24,200
ETMAC 125-131	0.493	0.515	0.138	64.17	4+4+4	YELLOW	28,000
ETMAC 131-139	0.516	0.547	0.138	66.14	4+4+4	GREEN	28,600
ETMAC 139-146	0.548	0.574	0.159	72.05	4+4+4	BLACK	36,500
ETMAC 146-152	0.575	0.599	0.159	72.05	5+4+4	RED	37,500

NOTE: State the direction of the retention wiring, which will be similar to that of the cable. Code according to direction of wiring.

Retentions for other conductor Ø upon request.