


This drawing is property of I. Arruti and must not be copied, exhibited or furnished without the written consent of I. Arruti

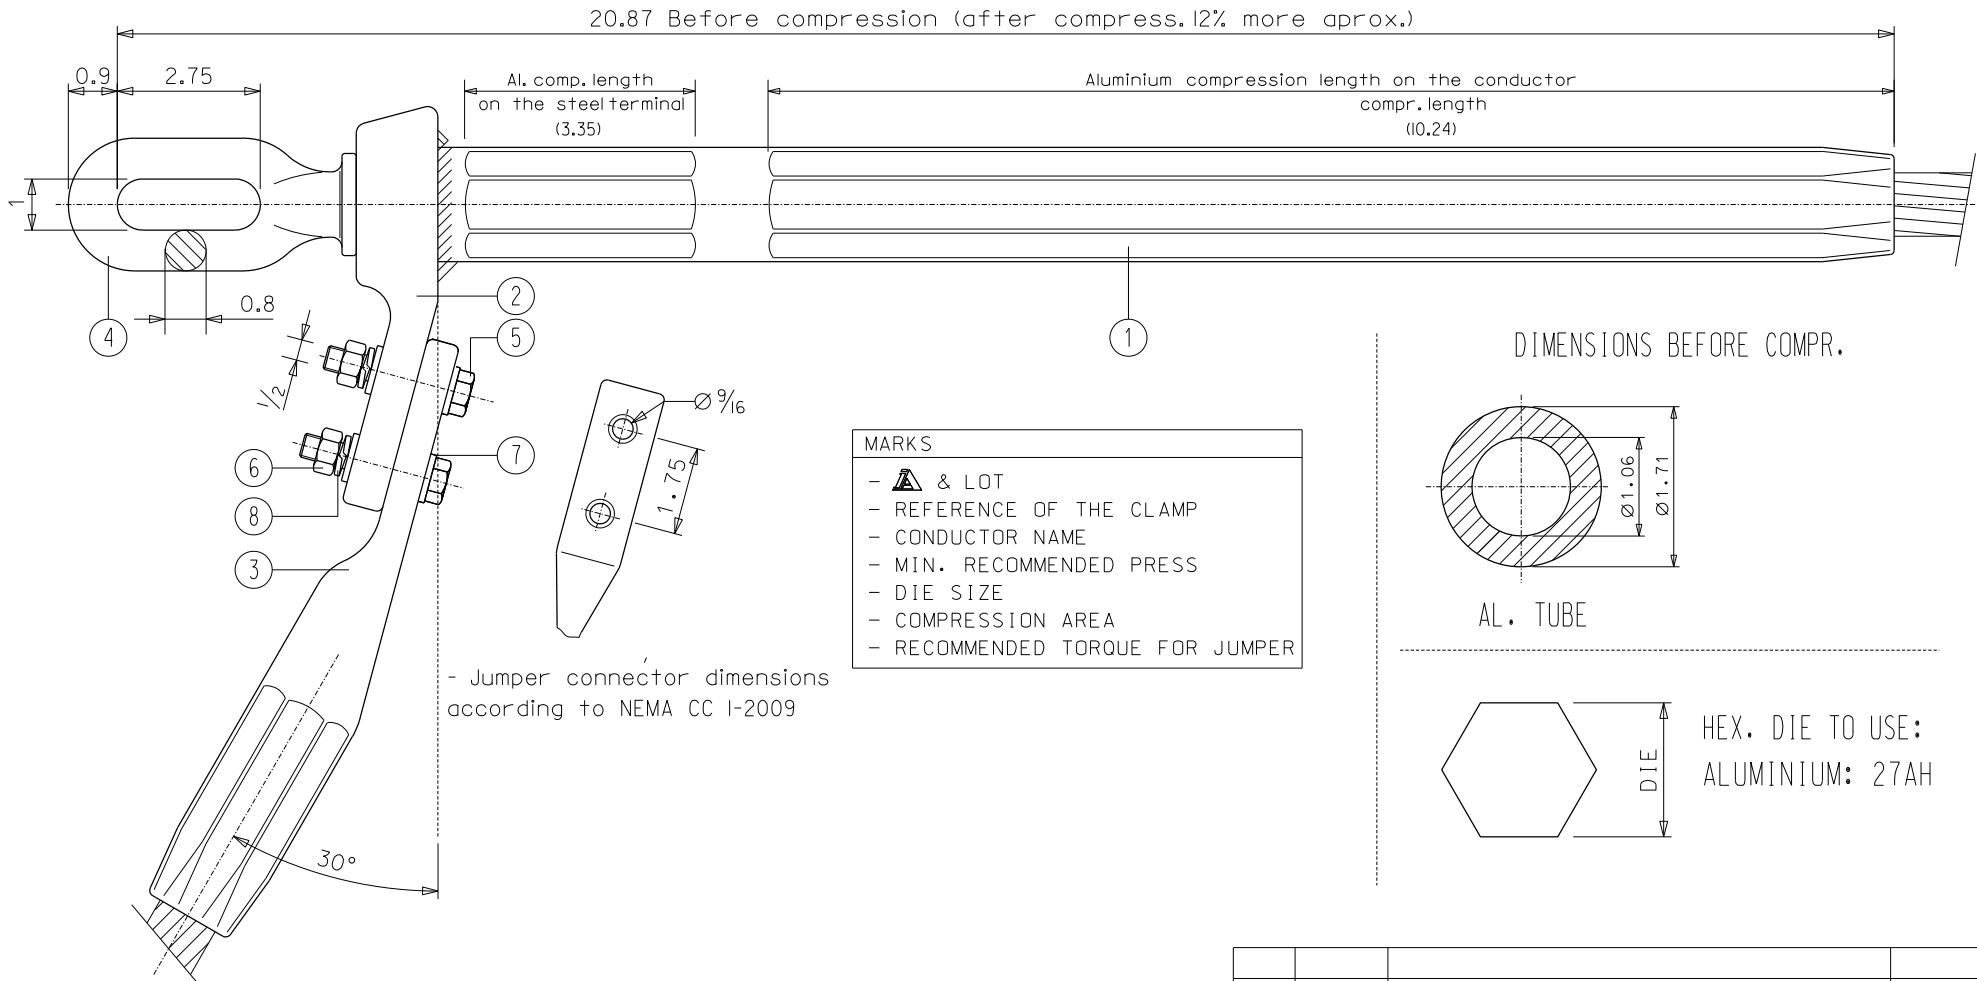

- Jumper connector dimensions according to NEMA CC 1-2009

**Notes:**

- Both sides of the pad are finished to present excellent electrical contact surfaces
- Electrical connection pads will be supplied with a protective covering
- Hot dip galvanized according to ASTM A153
- Tolerances unless otherwise stated to be up to and including 1.4" ±0.027 Over 1.4" ±2%
- All dimensions in inches

N	QTY	DENOMINATION	MATERIAL
8	2	SPRING LOCK 1/2" ASME B18.21.1	STAINLESS STEEL
7	4	FLAT WASHER 1/2" ASME B18.21.1	STAINLESS STEEL
6	2	HEX NUT 1/2" ASME B18.2.2	STAINLESS STEEL
5	2	BOLT 1/2"x2.5 ASME B18.2.1	STAINLESS STEEL
4	1	EYE TERMINAL	FORGING STEEL GALV.
3	1	JUMPER CONNECTOR DC-43,5	ALUMINIUM ALLOY
2	1	DEAD END LUG	ALUMINIUM
1	1	CLAMP BODY	ALUMINIUM ALLOY

MOD.	DATE	MODIFICATION	DRAWN BY
		CODE	
		<b>EYE TERMINAL COMPRESSION CLAMP C-374-AA/AM-IX FOR ACAR 739,8 MCM CONDUCTOR</b>	
		UNIT (inch)	Recomended Torque: 35 f+lb
			Aprox. Weight: 7.25 lb
			U.S.: 95% of conductor R.B.S.
DRAWN	J.E.	05-05-21	SCALE
CHECKED	I.L.	05-05-21	DWG No
		D/S	C374AAAMIX
			ISSUE
			1

ARCHIVO:usacompression