


This drawing is property of I. Arruti and must not be copied, exhibited or furnished without the written consent of I. Arruti

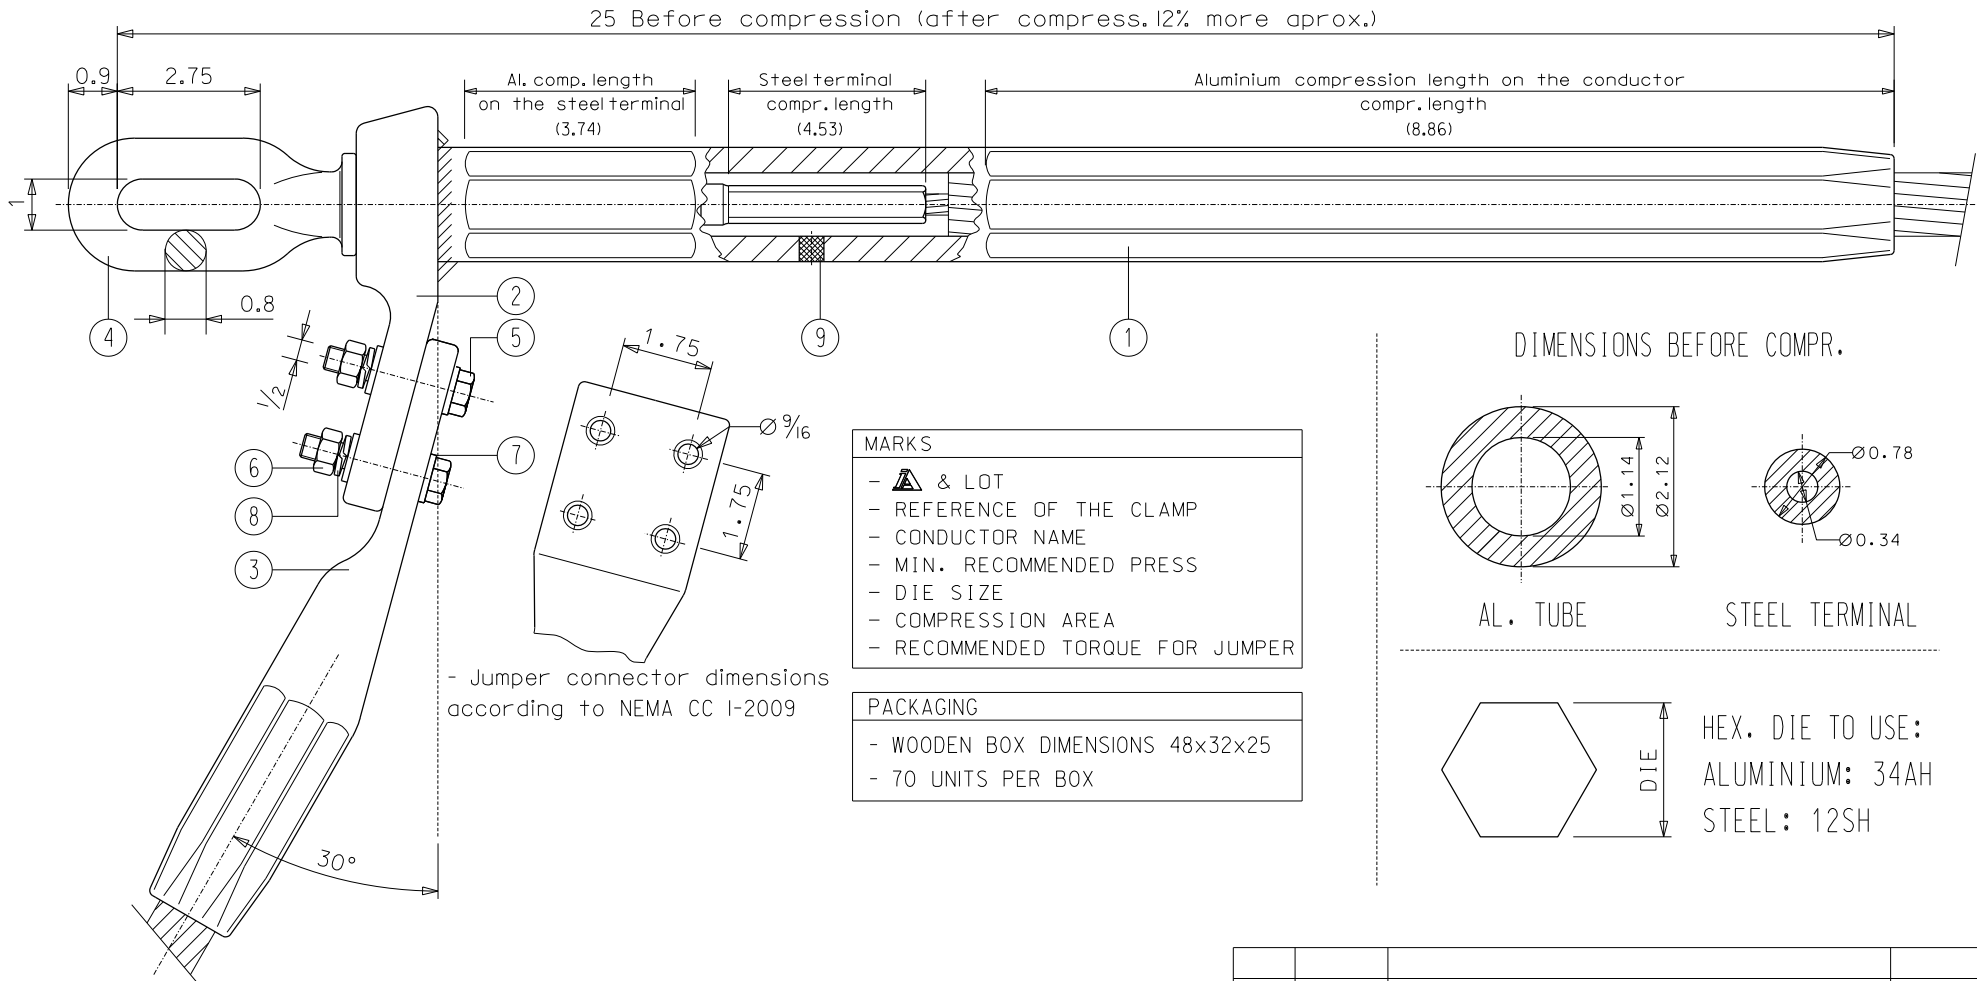

MARKS	
-	▲ & LOT
-	REFERENCE OF THE CLAMP
-	CONDUCTOR NAME
-	MIN. RECOMMENDED PRESS
-	DIE SIZE
-	COMPRESSION AREA
-	RECOMMENDED TORQUE FOR JUMPER


PACKAGING	
-	WOODEN BOX DIMENSIONS 48x32x25
-	70 UNITS PER BOX

- Jumper connector dimensions according to NEMA CC I-2009

**Notes:**

- Both sides of the pad are finished to present excellent electrical contact surfaces
- Electrical connection pads will be supplied with a protective covering
- Hot dip galvanized according to ASTM A153
- Tolerances unless otherwise stated to be up to and including 1.4" ±0.027 Over 1.4" ±2%
- All dimensions in inches

N	QTY	DENOMINATION	MATERIAL
9	1	FILLER PLUG	ALUMINIUM
8	4	SPRING LOCK 1/2" ASME B18.21.1	STAINLESS STEEL
7	8	FLAT WASHER 1/2" ASME B18.21.1	STAINLESS STEEL
6	4	HEX NUT 1/2" ASME B18.2.2	STAINLESS STEEL
5	4	BOLT 1/2"x2.5 ASME B18.2.1	STAINLESS STEEL
4	1	EYE TERMINAL	FORGING STEEL GALV.
3	1	JUMPER CONNECTOR DC-54	ALUMINIUM
2	1	DEAD END LUG	ALUMINIUM
1	1	CLAMP BODY	ALUMINIUM

MOD.	DATE	MODIFICATION			DRAWN BY
		CODE			
 <b>INDUSTRIAS ARRUTI S.A.</b>					
UNIT (inch)		Recomended Torque: 35 f+lb			
		Aprox. Weight: 12.00 lb			
		U.S.: 95% of conductor R.B.S.			
DRAWN	J.E.	03-11-20	SCALE	DWG No	ISSUE
CHECKED	I.L.	03-11-20	D/S	C442SSAMIX	0

ARCHIVO: usacompression