


This drawing is property of I. Arruti and must not be copied, exhibited or furnished without the written consent of I. Arruti

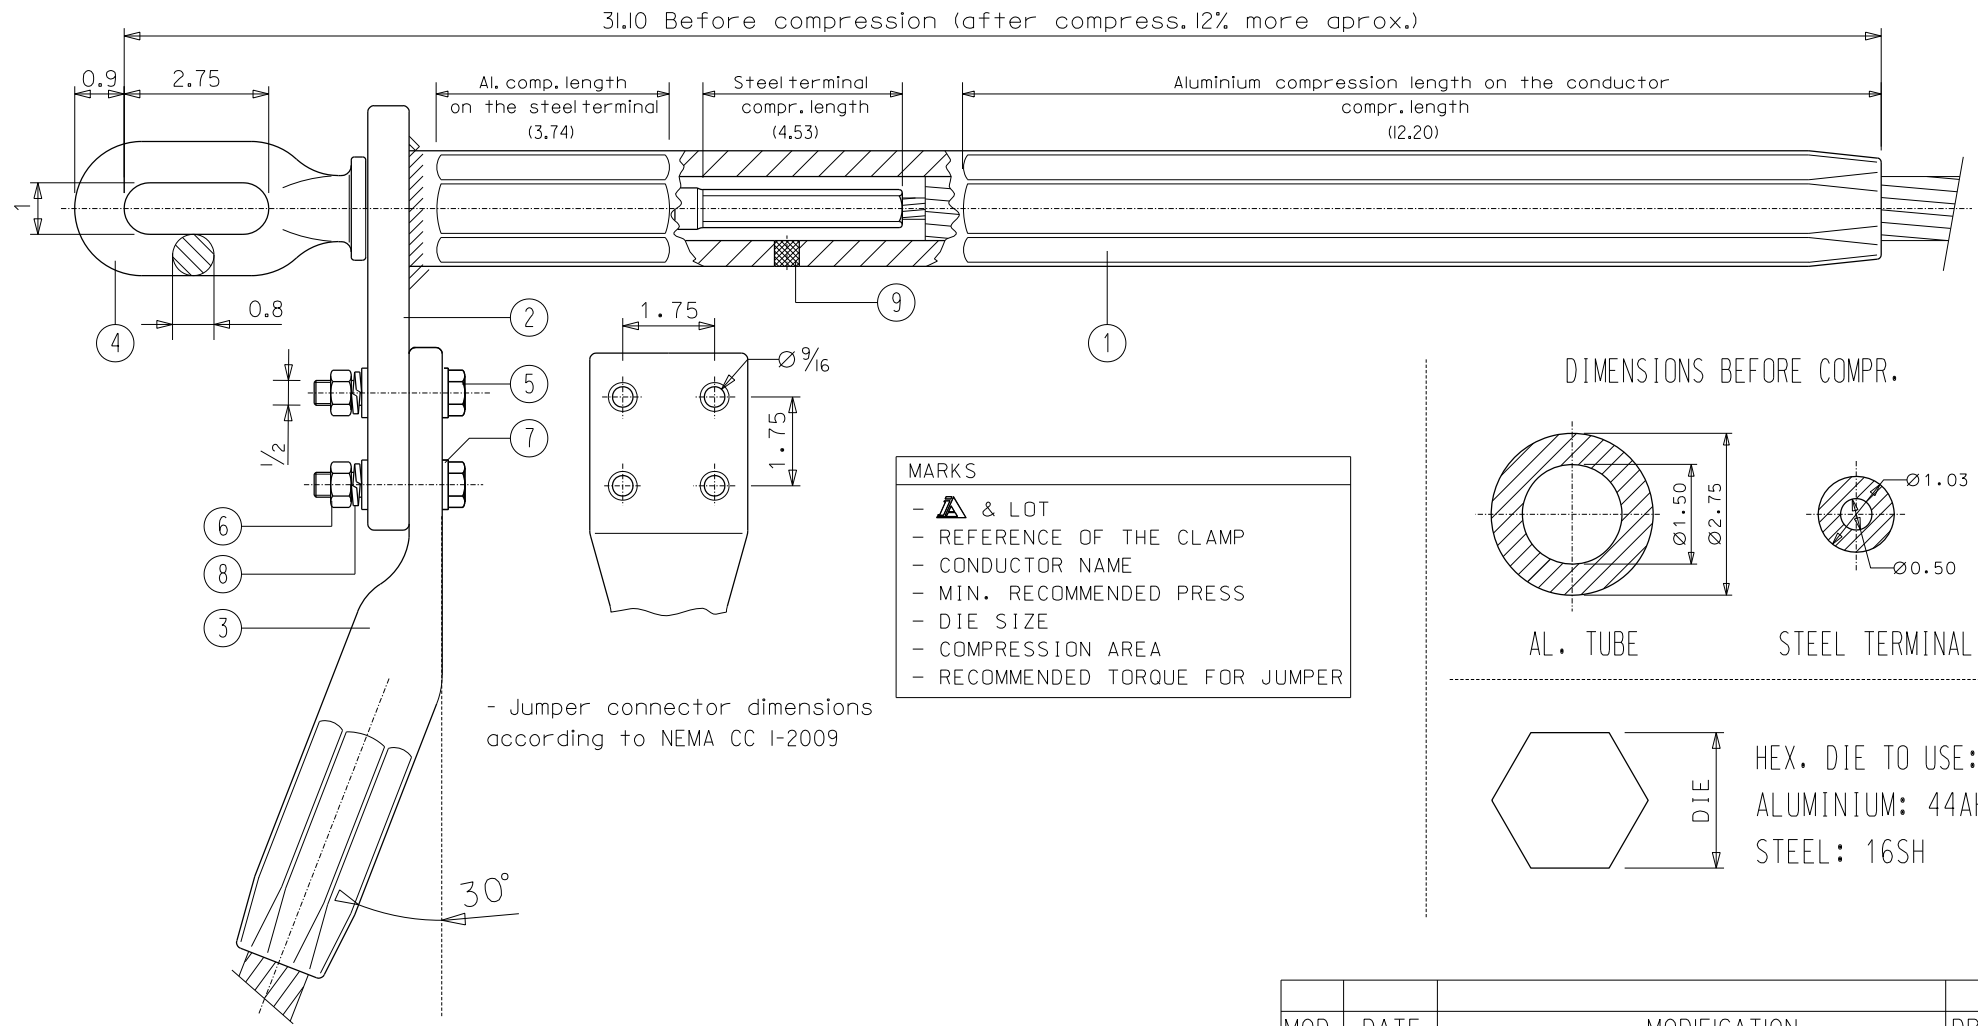

- Jumper connector dimensions according to NEMA CC I-2009

- Notes:**
- Both sides of the pad are finished to present excellent electrical contact surfaces
 - Electrical connection pads will be supplied with a protective covering
 - Hot dip galvanized according to ASTM A153
 - Tolerances unless otherwise stated to be up to and including 1.4" mm. ±0.7 mm. Over 1.4" mm. ±2%
 - All dimensions in inches

QTY	DENOMINATION	MATERIAL
9	1 FILLER PLUG	ALUMINIUM
8	4 SPRING LOCK 1/2" ASME B18.21	STAINLESS STEEL
7	8 FLAT WASHER 1/2" ASME B18.21	STAINLESS STEEL
6	4 HEX NUT 1/2" ASME B18.2.2	STAINLESS STEEL
5	4 BOLT 1/2"x2.5 ASME B18.2.1	STAINLESS STEEL
4	1 EYE TERMINAL 7470-F	FORGING STEEL GALV.
3	1 JUMPER CONNECTOR DC-70	ALUMINIUM
2	1 DEAD END LUG	ALUMINIUM
1	1 CLAMP BODY	ALUMINIUM

MOD.	DATE	MODIFICATION	DRAWN BY
 INDUSTRIAS ARRUTI S.A.		CODE	
		EYE TERMINAL COMPRESSION CLAMP C-771-SS/AM-IX FOR ACSS MARTIN CONDUCTOR	
F40513		NAME	
DRAWN	J.E.	UNIT (inch) Recommended Torque: 35 ftlb Aprox. Weight: 24.20 lb U.S.: 95% of conductor R.B.S.	
CHECKED	I.L.	09-09-20	09-09-20
		SCALE	DWG No
		D/S	C771SSAMIX
			ISSUE
			0

ARCHIVO-usocompression