




Industrias Arruti

**PREFORMED CLAMPS FOR OPGW CABLES**

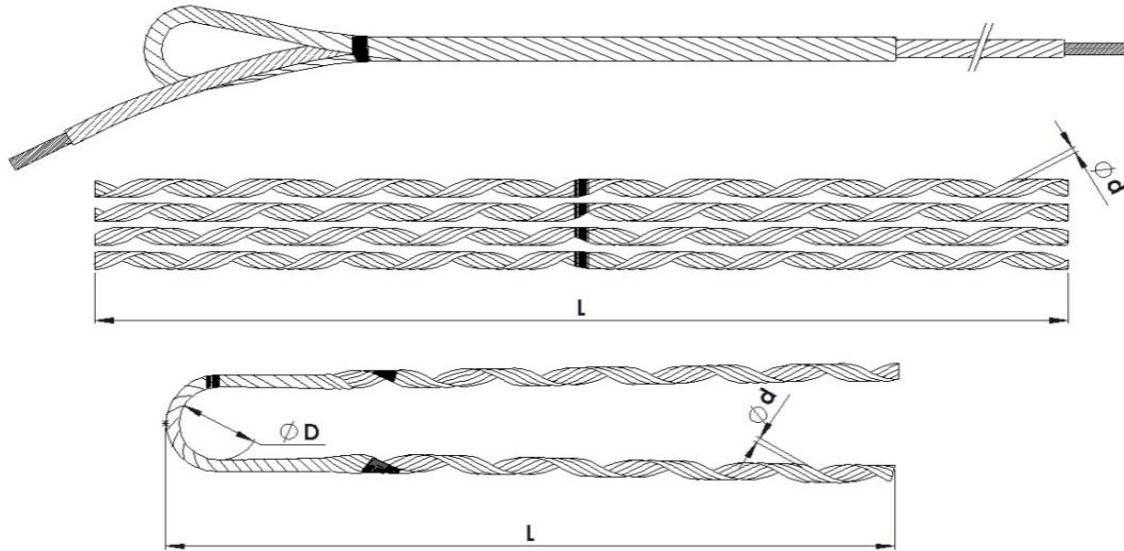

Application: Fibre optic cables.  
Material: Steel covered in Aluminium. Protection joint: Steel covered in aluminium.

Reference	Ø Conductor (inch)		Dimensions (inch)			Nº Armour rods	Identification colour	Ultimate strength (lb)
	Min.	Max.	Ø d (Rods)	Ø D (Loop)	L			
RAAW FO 13/D	0,3	0,33	0,14	2,48	39,37	6	YELLOW	13.500
EPAW FO 8/D/2000			0,1		78,74	(4+3+3)	GREEN	
RAAW FO 14/D	0,34	0,37	0,14	2,48	44,1	6	RED	13.500
EPAW FO 9/D/2000			0,1		78,74	(3+4+4)	ORANGE	
RAAW FO 15/D	0,38	0,4	0,16	2,48	45,28	6	BLUE	15.000
EPAW FO 10/I/2200			0,1		86,61	(4+4+5)	GREEN	
RAAW FO 16/D	0,4	0,42	0,16	2,48	45,28	6	GREEN	16.000
EPAW FO 10,5/I/2200			0,1		86,61	(4+4+5)	GREEN	
RAAW FO 17/D	0,42	0,46	0,16	2,48	45,28	6	BLACK	17.000
EPAW FO 11/I/2200			0,1		86,61	(4+4+4)	BLUE	
RAAW FO 19/D	0,46	0,51	0,16	2,48	54,33	6	YELLOW	20.000
EPAW FO 12/I/2600			0,13		102,36	(4+4+4)	RED	
RAAW FO 19/D	0,48	0,5	0,16	2,48	54,33	6	YELLOW	20.000
EPAW FO 12,5/D/2600			0,13		102,36	(4+4+4)	BLUE	
RAAW FO 20/D	0,51	0,54	0,16	2,48	54,33	6	BLACK	21.000
EPAW FO 13/I/2600			0,13		102,36	(4+3+3+3)	YELLOW	
RAAW FO 21/D	0,54	0,57	0,16	2,48	54,33	7	RED	27.000
EPAW FO 14/I/2600			0,13		102,36	(4+4+3+3)	RED	
RAAW FO 21,5/D	0,57	0,61	0,16	2,48	54,33	7	GREEN	27.000
EPAW FO 15/I/2600			0,13		102,36	(4+4+3+3)	BLUE	
RAAW FO 22,5/D	0,61	0,65	0,16	2,48	54,33	7	BLUE	27.000
EPAW FO 16/I/2600			0,13		102,36	(4+4+4+3)	GREEN	
RAAW FO 23,5/D	0,65	0,69	0,16	2,48	54,33	7	YELLOW	27.000
EPAW FO 17/I/2600			0,13		102,36	(4+4+4+4)	BLACK	
RAAW FO 24,5/D	0,69	0,73	0,16	2,48	54,33	7	RED	27.000
EPAW FO 18/I/2600			0,13		102,36	(5+4+4+4)	RED	
RAAW FO 25,5/D	0,74	0,77	0,16	2,48	54,33	8	BLACK	27.000
EPAW FO 19/I/2600			0,13		102,36	(5+5+4+4)	GREEN	
RAAW FO 26,5/D	0,77	0,81	0,16	2,48	54,33	8	BLUE	27.000
EPAW FO 20/I/2600			0,13		102,36	(5+5+4+4)	BLACK	
RAAW FO 27,5/D	0,81	0,87	0,16	2,48	54,33	8	GREEN	27.000
EPAW FO 21,5/I/2600			0,13		102,36	(5+5+5+5)	GREEN	
RAAW FO 28,5/D	0,87	0,9	0,16	2,48	54,33	8	GREEN	27.000
EPAW FO 22/D/2600			0,13		102,36	(5+5+5+5)	BLUE	

NOTE: State the direction of the retention wiring, which will be similar to that of the cable. Code according to direction of wiring.  
Retentions for other conductor Ø upon request.